

Approvals & Disclaimer



The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that Chroma-Q products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent. Chroma-Q sole warranty is that the product will meet the Chroma-Q sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

Chroma-Q reserves the right to change or make alteration to devices and their functionality without notice due to on-going research and development.

The Chroma-Q Magic Box EtherSwitch 7 has been designed specifically for the professional entertainment lighting industry. Regular maintenance should be performed to ensure that the products perform well in the entertainment environment.

If you experience any difficulties with any Chroma-Q products please contact your selling dealer. If your selling dealer is unable to help please contact support@chroma-q.com. If the selling dealer is unable to satisfy your servicing needs, please contact the following for full factory service:

Outside North America:

Tel: +44 (0)1494 446000

Fax: +44 (0)1494 461024

support@chroma-q.com

North America:

Tel: +1 416-255-9494

Fax: +1 416-255-3514

support@chroma-q.com

For further information please visit the Chroma-Q website at www.chroma-q.com.

Chroma-Q is a trademark, for more information on this visit www.chroma-q.com/trademarks.

The rights and ownership of all trademarks are recognised.

Quick Start Guide

Magic Box™

EtherSwitch 7™



For a full product manual please visit www.ac-et.com

1. Product Description

The EtherSwitch 7 is a heavy duty, high speed unmanaged network switch that supports simultaneous computer connections. Designed to satisfy the requirement of entertainment touring applications, the EtherSwitch 7 is equipped with seven shielded Ethercon ports (RJ45) providing 10 / 100 / 1000 Mbps Bandwidth in full-duplex mode. This stand-alone unit enables the concurrent use of various multimedia devices within a network without traffic restrictions.

2. Operation

Unpacking the unit:


The EtherSwitch 7 package includes 1 unit EtherSwitch 7, a power cord and a Quick Start Guide. We recommend that you keep the original packaging in case items need to be returned.

Power:

Power for the EtherSwitch 7 is connected through a male IEC chassis connector with input rating of 100-240V AC, 50-60Hz. There is no power button and plugging into the power outlet will immediately power the unit on.

RJ45 Ethercon Ports:

The EtherSwitch 7 system utilises CAT5e cable to send and receive data (all IEEE 802.3 protocol) through 7 shielded RJ45 Gigabit Ethercon ports. There are 2 ports at the front panel and 5 ports at the rear panel. These ports support network speeds of 10Mbps, 100Mbps, and can operate in half- and full- duplex transfer modes. Automatic MDI/MDIX crossover detection is supported. The EtherSwitch 7 will automatically detect the settings of the external device immediately upon connection. Send and receive data (all IEEE 802.3 protocol) to and from an external source through any of the seven shielded RJ45 Ethercon ports. There are 2 ports at the front panel and 5 ports at the rear panel.

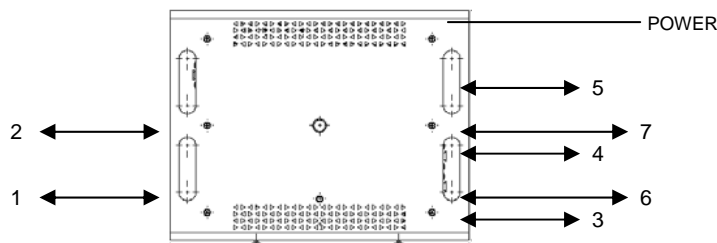

Front: 2 Ethercon Ports



Rear: 5 Ethercon Ports



LED Indicators:



1. The LED indicator for power at the front panel will light up Green when the EtherSwitch 7 is receiving power, otherwise, it is off.
2. Cable Diagnostic will start upon power up, which will determine if the Ethernet cables connected are in good working condition. This process is indicated by the **Speed** LED corresponding to each of the 7 ports blinking Green sequentially. The initial port scan takes about 10 seconds. A detected cable fault will be indicated by the corresponding port's **Speed** LED glowing Amber for 5 seconds after the initial port scan. A good cable connection will be indicated by the corresponding port's **Speed** LED glowing Green for 5 seconds. The EtherSwitch 7 will then reset for normal operation.
3. The **Speed** LED indicators (Top) at the front panel that correspond to each port number will light up Green when there a secure connection is present. The Activity LED (Bottom) will blink when reception or transmission of data is occurring at the port.
4. The Speed LED indicator will light up green when the port is connected to a 1000Mbps Ethernet station, and amber when connected to a 100Mbps Ethernet device. The indicator will remain off when the port is connected to a 10Mbps Ethernet device.

3. Installation

Unique Magic Box interlocking enclosure facilitates easy rack mounting when used in pairs and easy truss mounting via captive nut insert. Rack mounting brackets are available in single unit and dual unit versions.

Note: for truss mounting, we recommend the use of a 1/2"-13UNC x 3/4" long bolt to avoid damage.

4. Further Information

Please refer to the Chroma-Q Magic Box EtherSwitch 7 manual for more detailed information. A copy of the manual can be found at the Chroma-Q website – www.chroma-q.com – under Support.