



# Chroma-Q™ 4Play™ 4 Way DMX Buffer

Part No:  
**CHDMX4**

## S P E C I F I C A T I O N S H E E T

V 1.3

### DESCRIPTION

The device shall be a fault tolerant, self healing 4 way DMX buffer designed to fully isolate all outputs from the input and each other.

### FEATURES

- 4 way DMX buffer.
- Fault tolerant, self healing.
- Each output fully isolated.
- 4 x 5 pin XLR connector outputs.
- 1 x 5 pin XLR connector input and through.
- Each output is separately generated and boosted from the original DMX signal.
- Data and power indicators.
- Suitable for truss mounting with a normal hook clamp.
- Will work with mains voltages worldwide (100-240V, 50/60Hz).
- Supplied with a chassis mounted IEC male to assist international cabling.


### OVERALL SPECIFICATIONS

Net dimensions:	Width (A): 148mm / 5.9" Height (B): 158mm / 6.3" Depth (C): 40mm / 1.6"
Net weight:	0.6kg / 1.3lbs
Colour:	Black
Power:	100-240V, 50-60Hz, 15W
Power connector:	IEC chassis male
DMX connector In:	XLR5
DMX connector Out:	4 x XLR5
DMX connector Thru:	XLR5

### ORDERING INFORMATION

**Model**  
Chroma-Q 4Play 4 Way DMX Buffer

**Part No.**  
CHDMX4

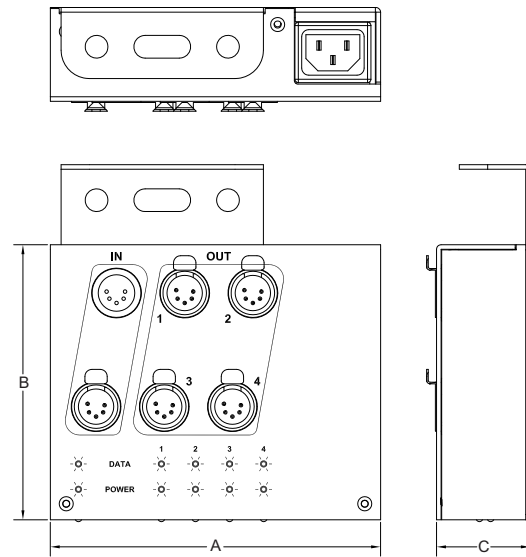

[www.chroma-q.com](http://www.chroma-q.com)

