

# IES Photometric Report 2inspire 300

Chroma-Q\_2inspire\_300\_Narrow\_CYAN.IES



Generated: 5/4/2026 1:39:07 PM

Generated: 5/4/2026 1:39:07 PM

Fixture Information

Manufacturer	Chroma-Q	Max Candela	4142.0 cd
Luminaire	2inspire-POE 300 Narrow w/o Diffusion (Cyan)	Est. Total Lumens	1700 lm
Lamp	LEDs	Beam Angle (50%)	28.7°
Format	IESNA:LM-63-2002	Field Angle (10%)	65.6°
Wattage	30.5 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	Absolute	Units	Feet
Num Lamps	1	W x L x H	-0.354 x -0.354 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	91 (0° – 90°)
H Angles	145 (0° – 360°)


IES Keywords

[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[ISSUE DATE]	2024-01-15
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-300 Narrow (Cyan)
[LUMINAIRE]	2inspire-POE 300 Narrow w/o Diffusion (Cyan)
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	53.63
[_CURRENT]	0.569
[_WATTAGE]	30.5
[_PF]	1.0
[_THD]	0.0
[_LUMENS]	1702
[_EFFICACY]	55.8
[_STABILIZATION TIME]	70

Polar Intensity Diagram (view max 4490 cd)

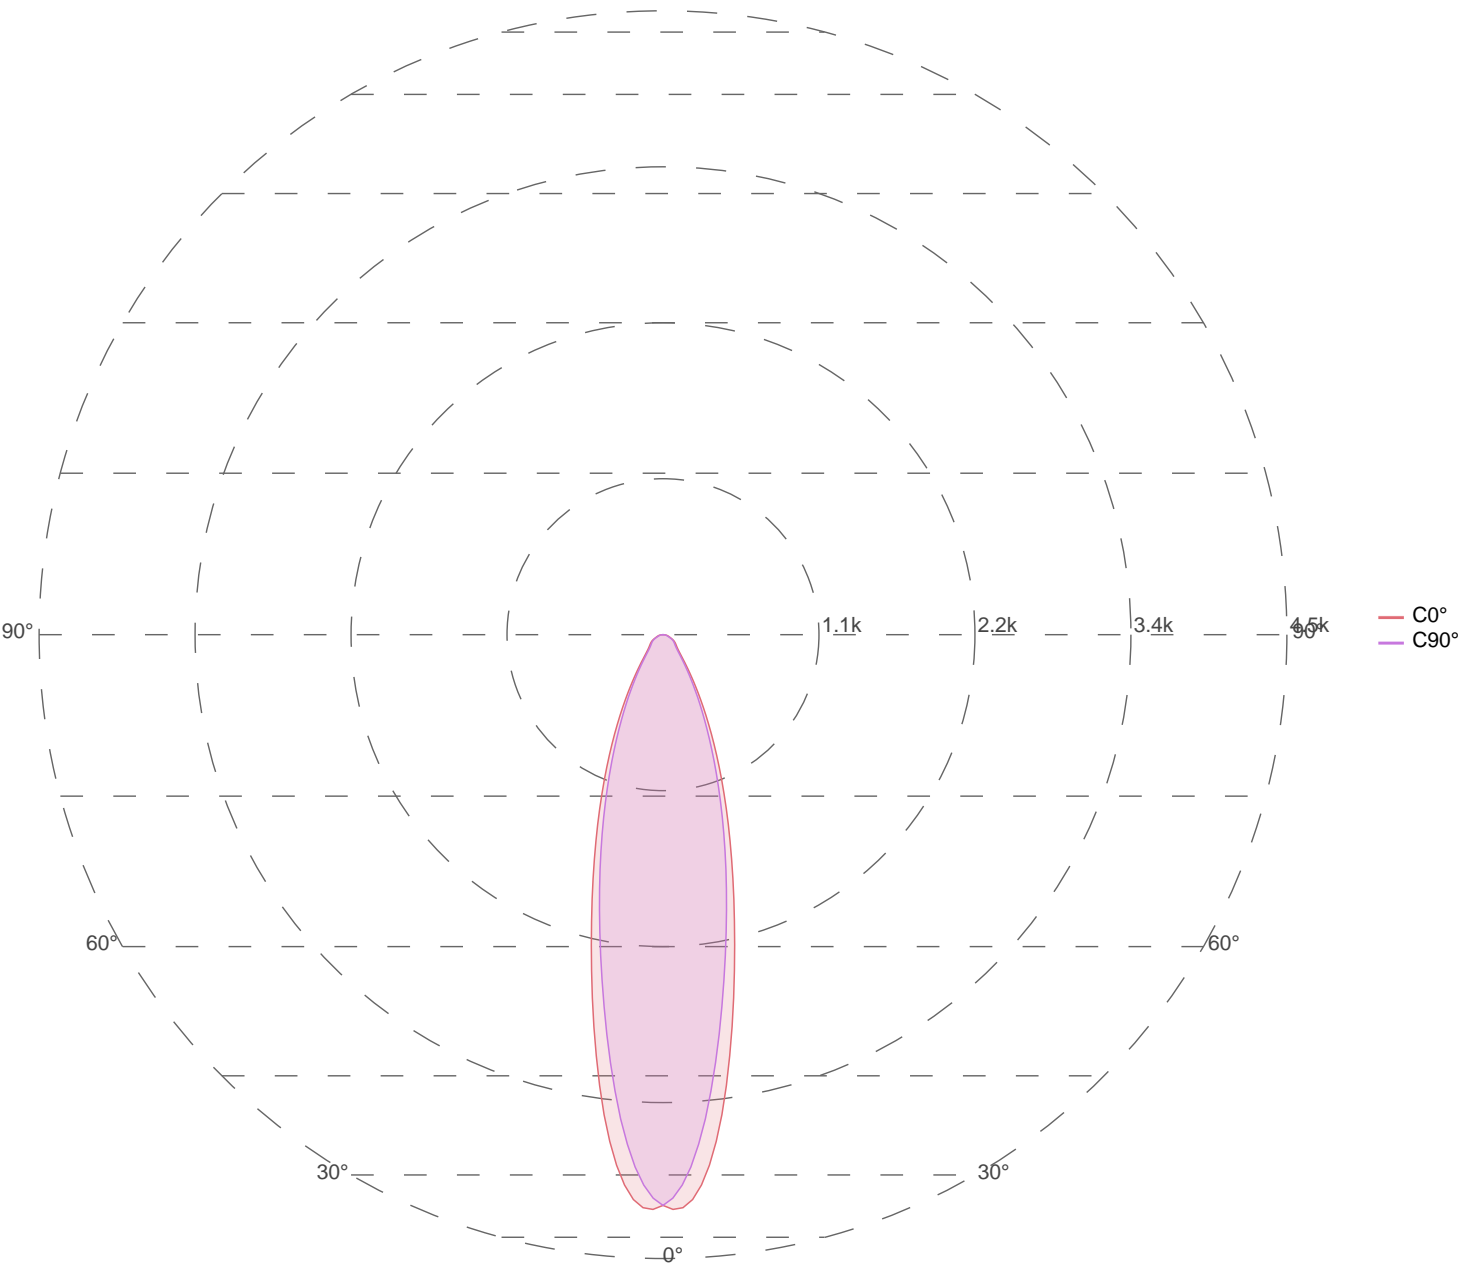

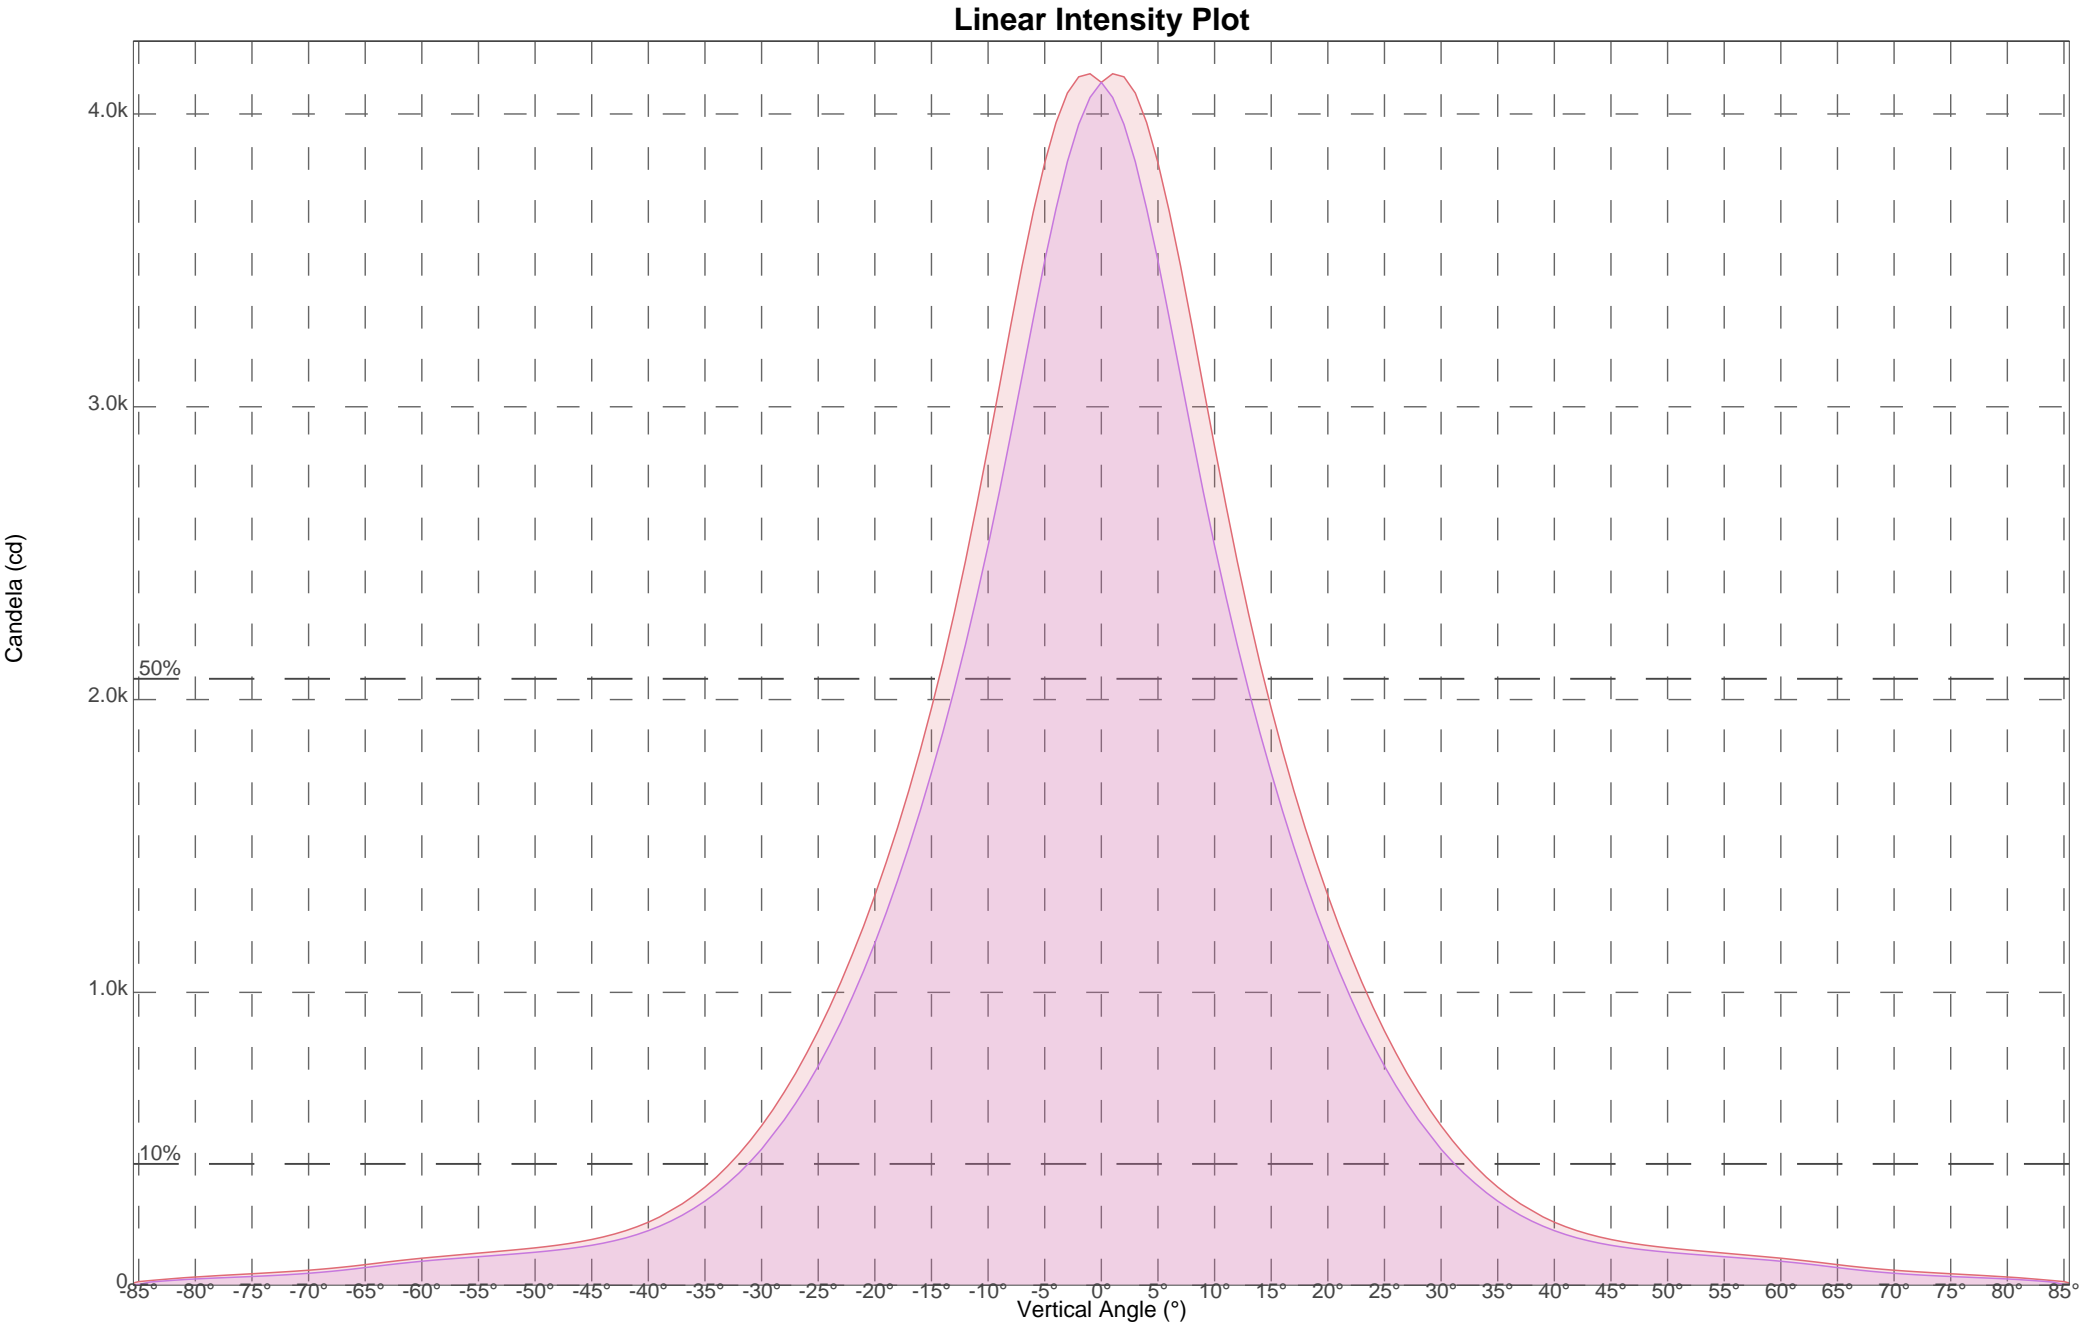

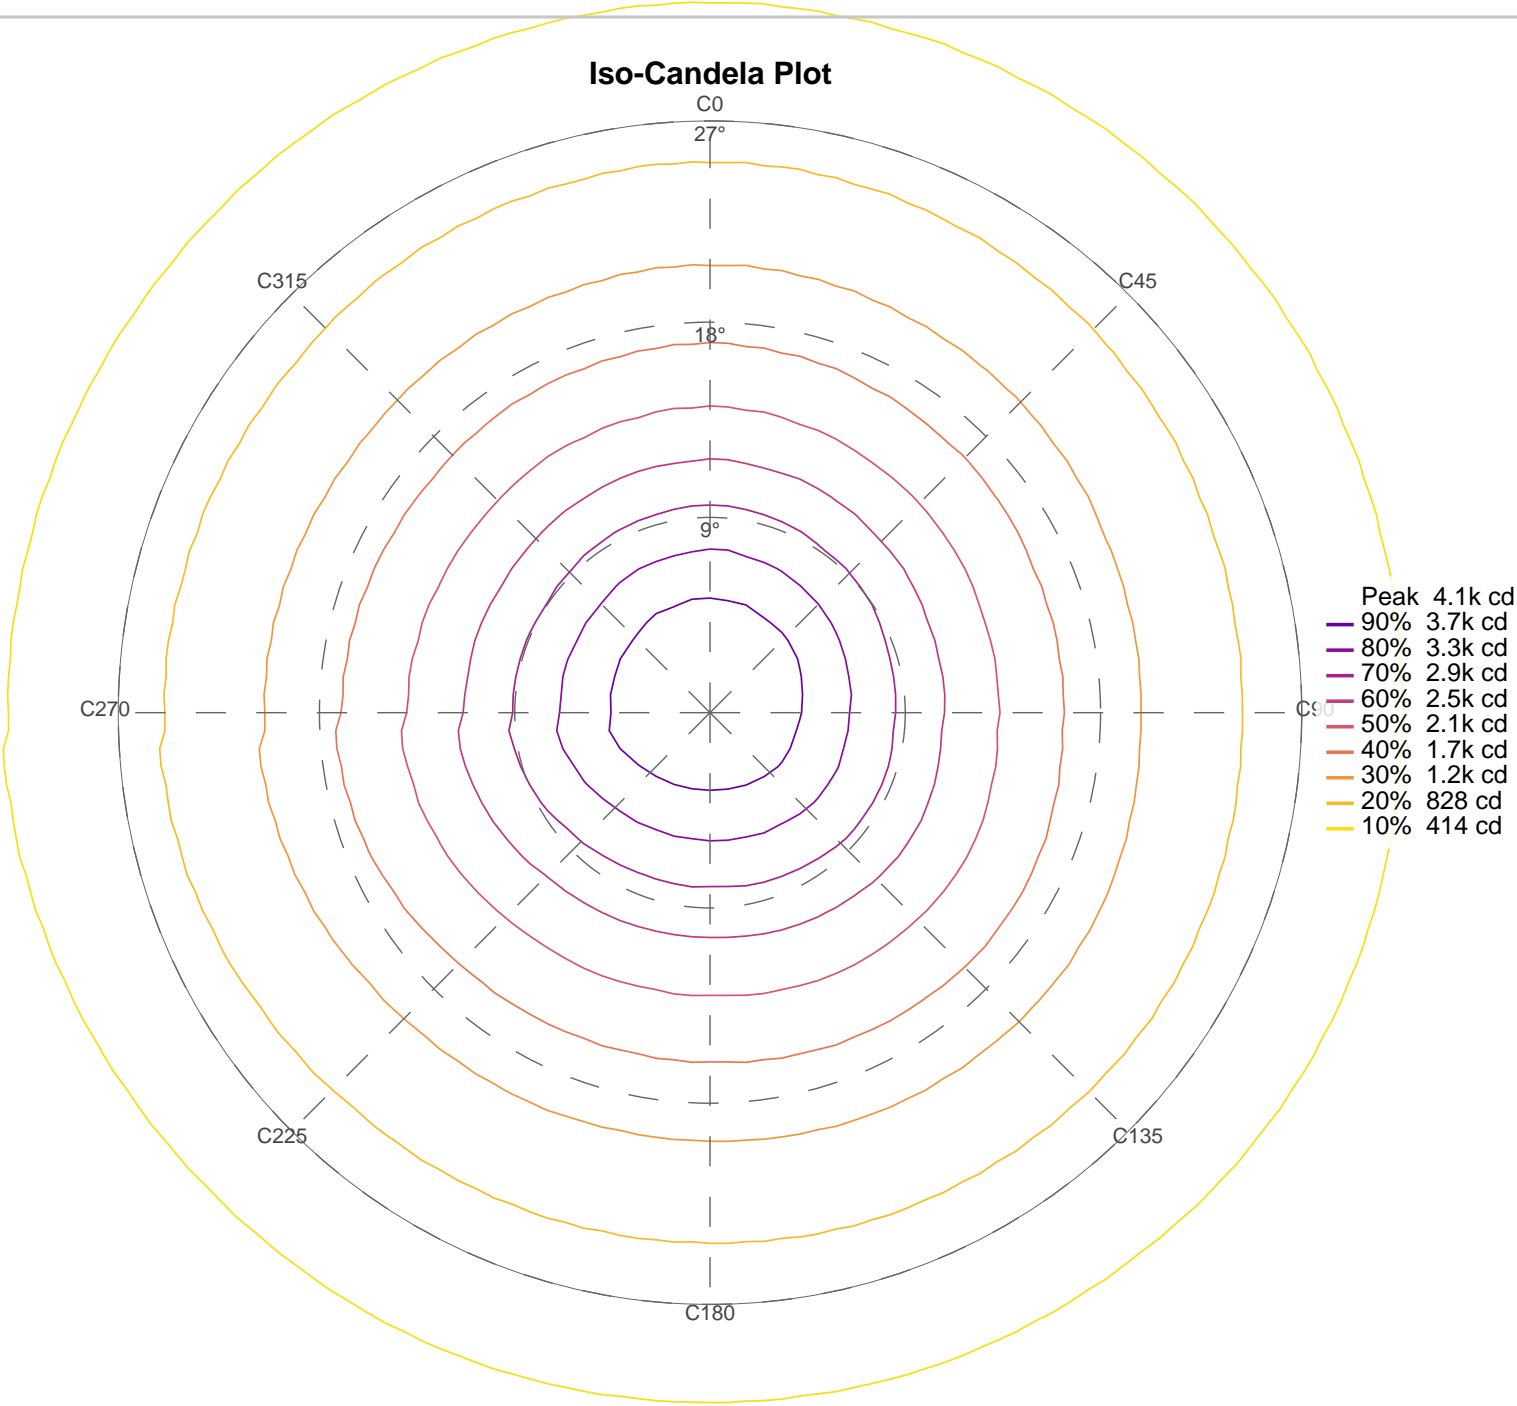


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	284.2 lx
Average	37.1 lx
Min	1.5 lx
Result grid	6 x 6 @ 1.0 m

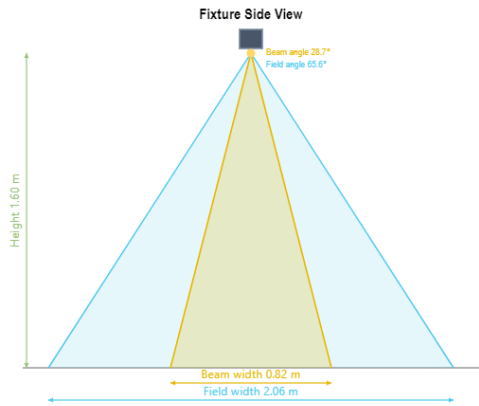

Iso-Illuminance

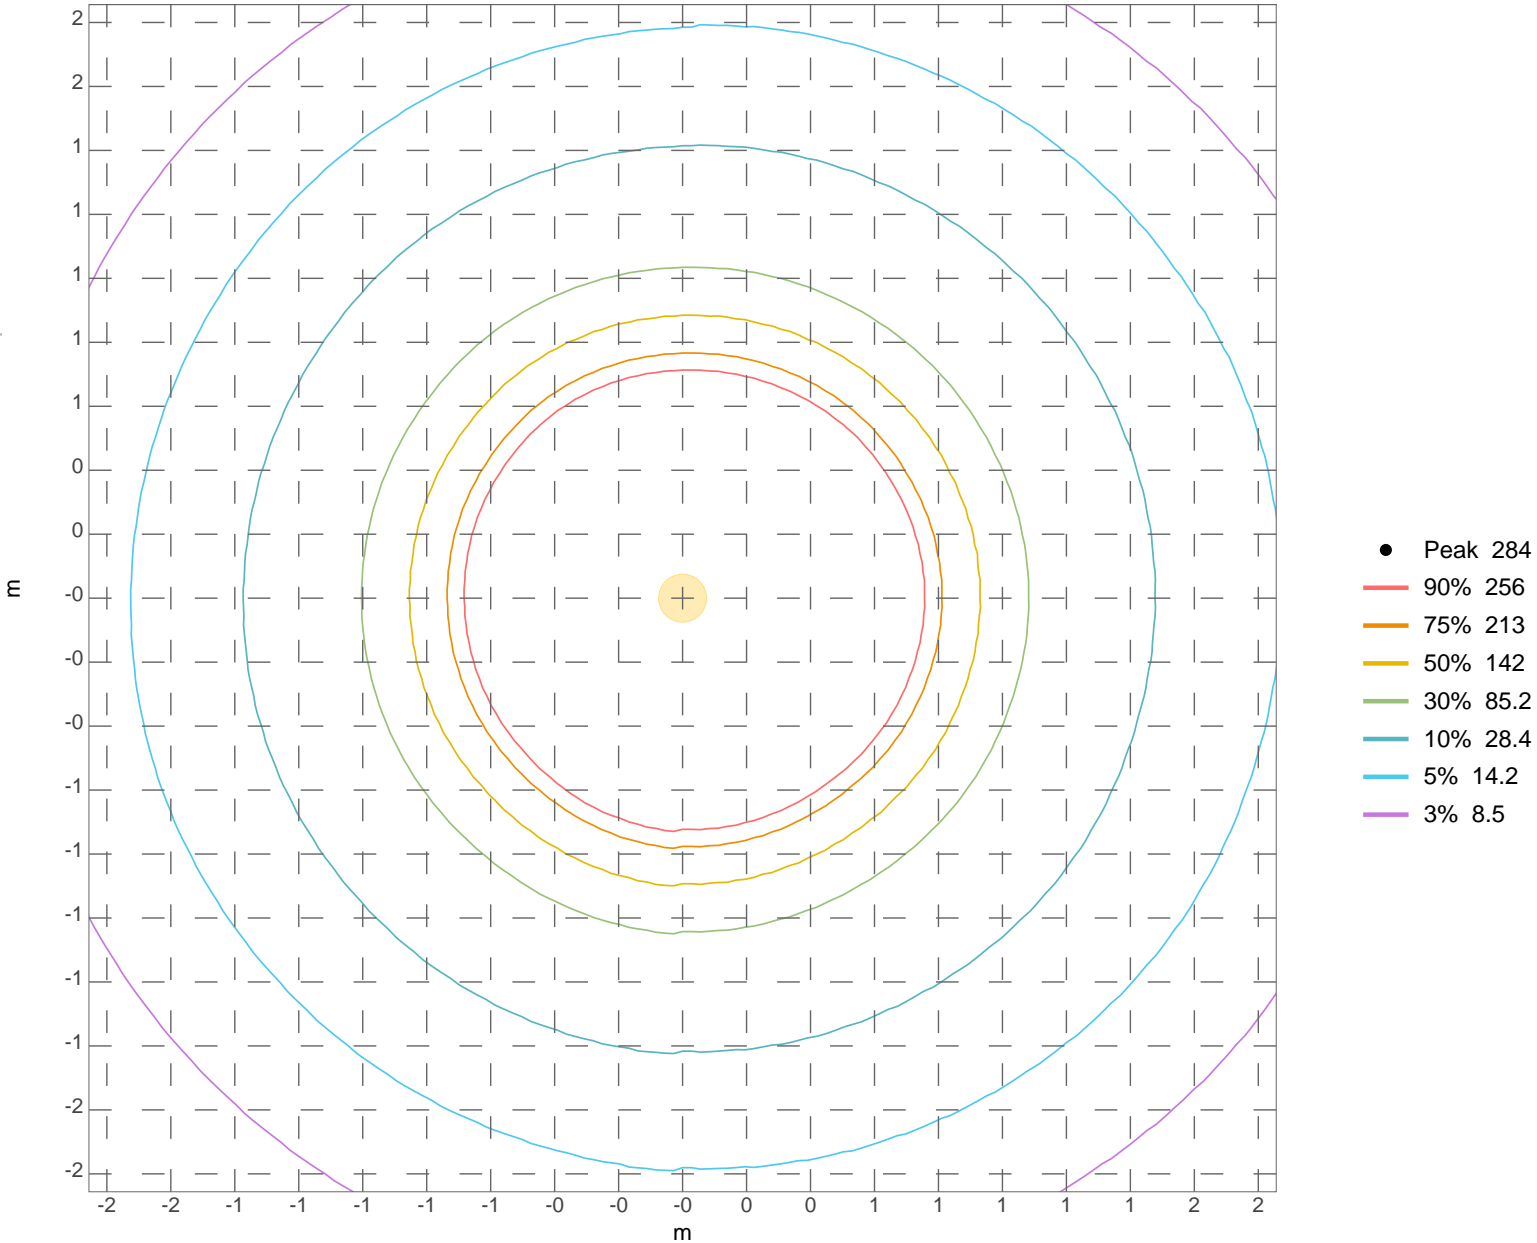

Beam Intensity

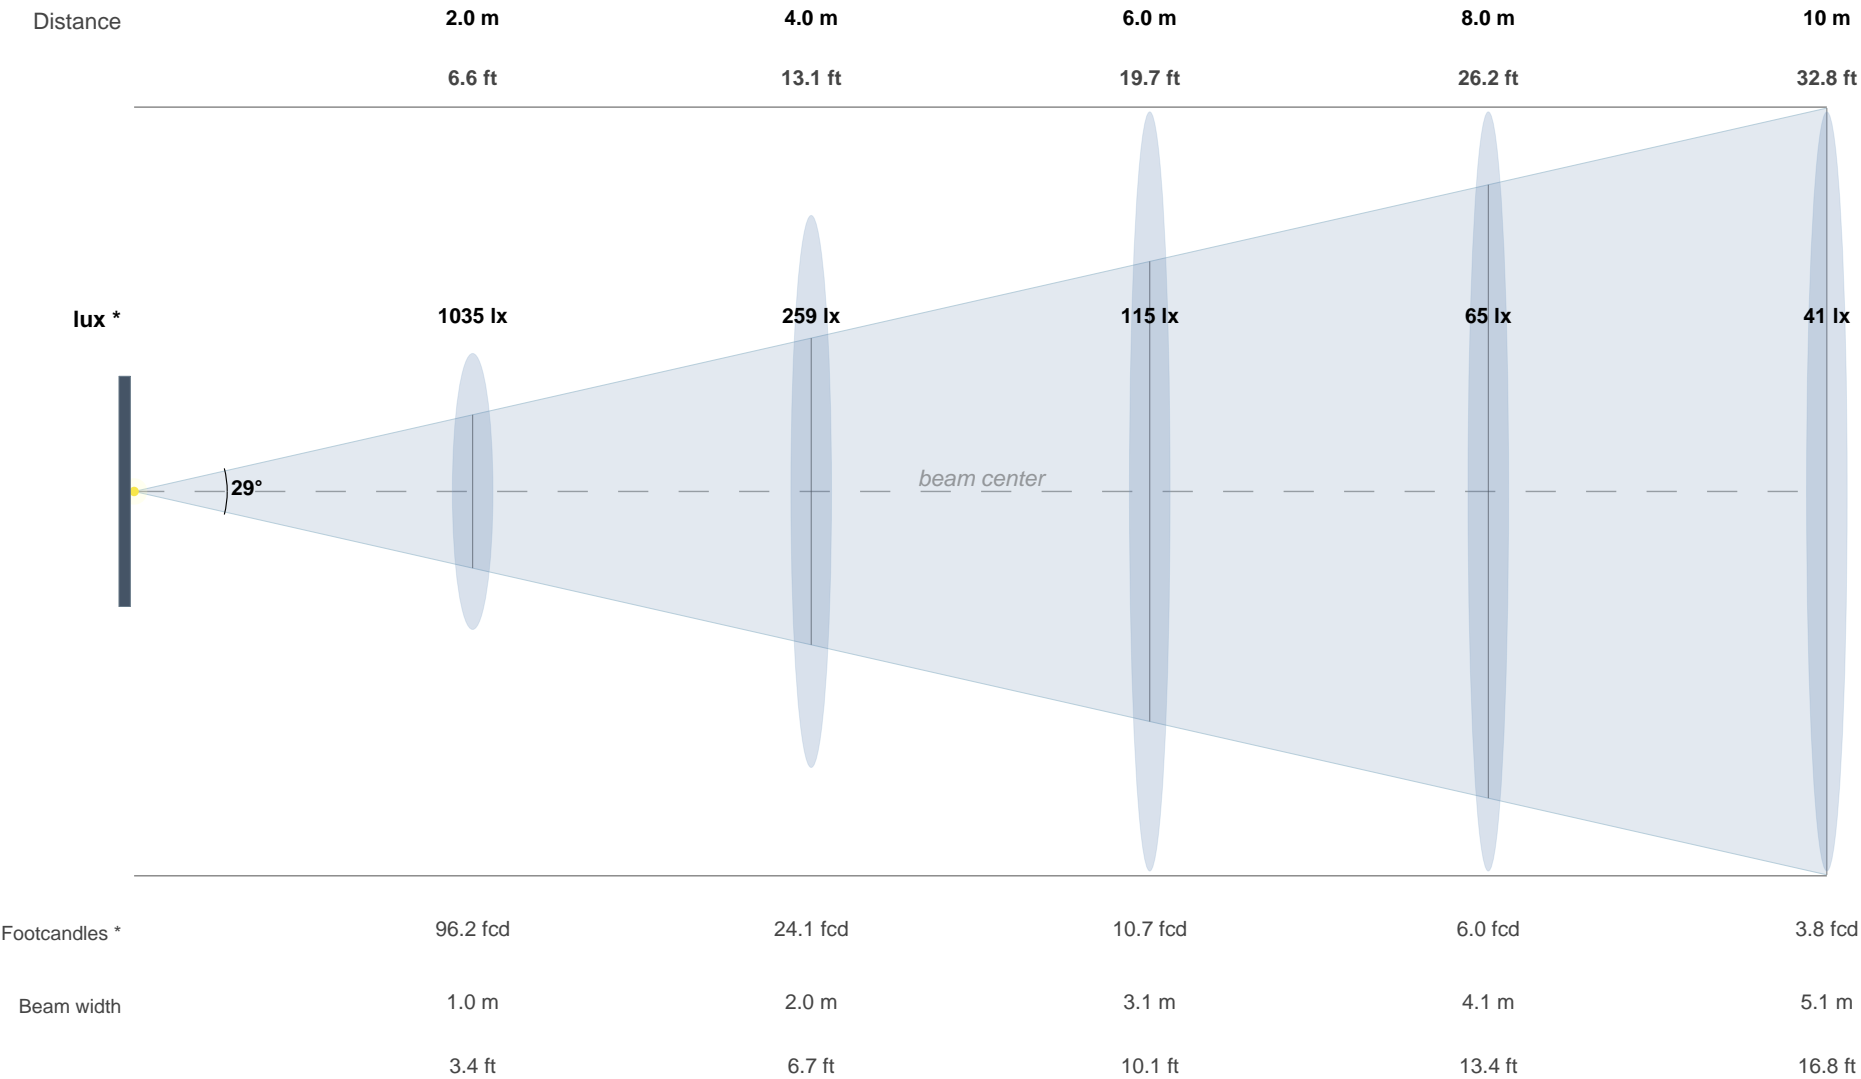

\* at beam centre