

# IES Photometric Report 2inspire 200

Chroma-Q\_2inspire\_200\_Asymmetrical\_4800K\_Snoot&HoneycombLouver.IES



Generated: 5/4/2026 2:10:09 PM

Generated: 5/4/2026 2:10:09 PM

Fixture Information


Manufacturer	Chroma-Q	Max Candela	3556.8 cd
Luminaire	LED Projector Luminaire at 4800K setting	Est. Total Lumens	638 lm
Lamp	LEDs	Beam Angle (50%)	20.0°
Format	IESNA:LM-63-2002	Field Angle (10%)	43.7°
Wattage	33.9 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	639 lm	Units	Meters
Num Lamps	1	W x L x H	-0.120 x -0.120 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	181 (0° – 180°)
H Angles	25 (0° – 360°)

IES Keywords

[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[TESTDATE]	23-06-2025
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-200_Asymmetrical_Snoot&HoneycombLouver(4800K)
[LUMINAIRE]	LED Projector Luminaire at 4800K setting
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	67.6
[_CURRENT]	0.5
[_WATTAGE]	33.8
[_PF]	0.56
[_THD]	0.0
[_LUMENS]	639.3
[_EFFICACY]	18.8
[_STABILIZATION TIME]	70

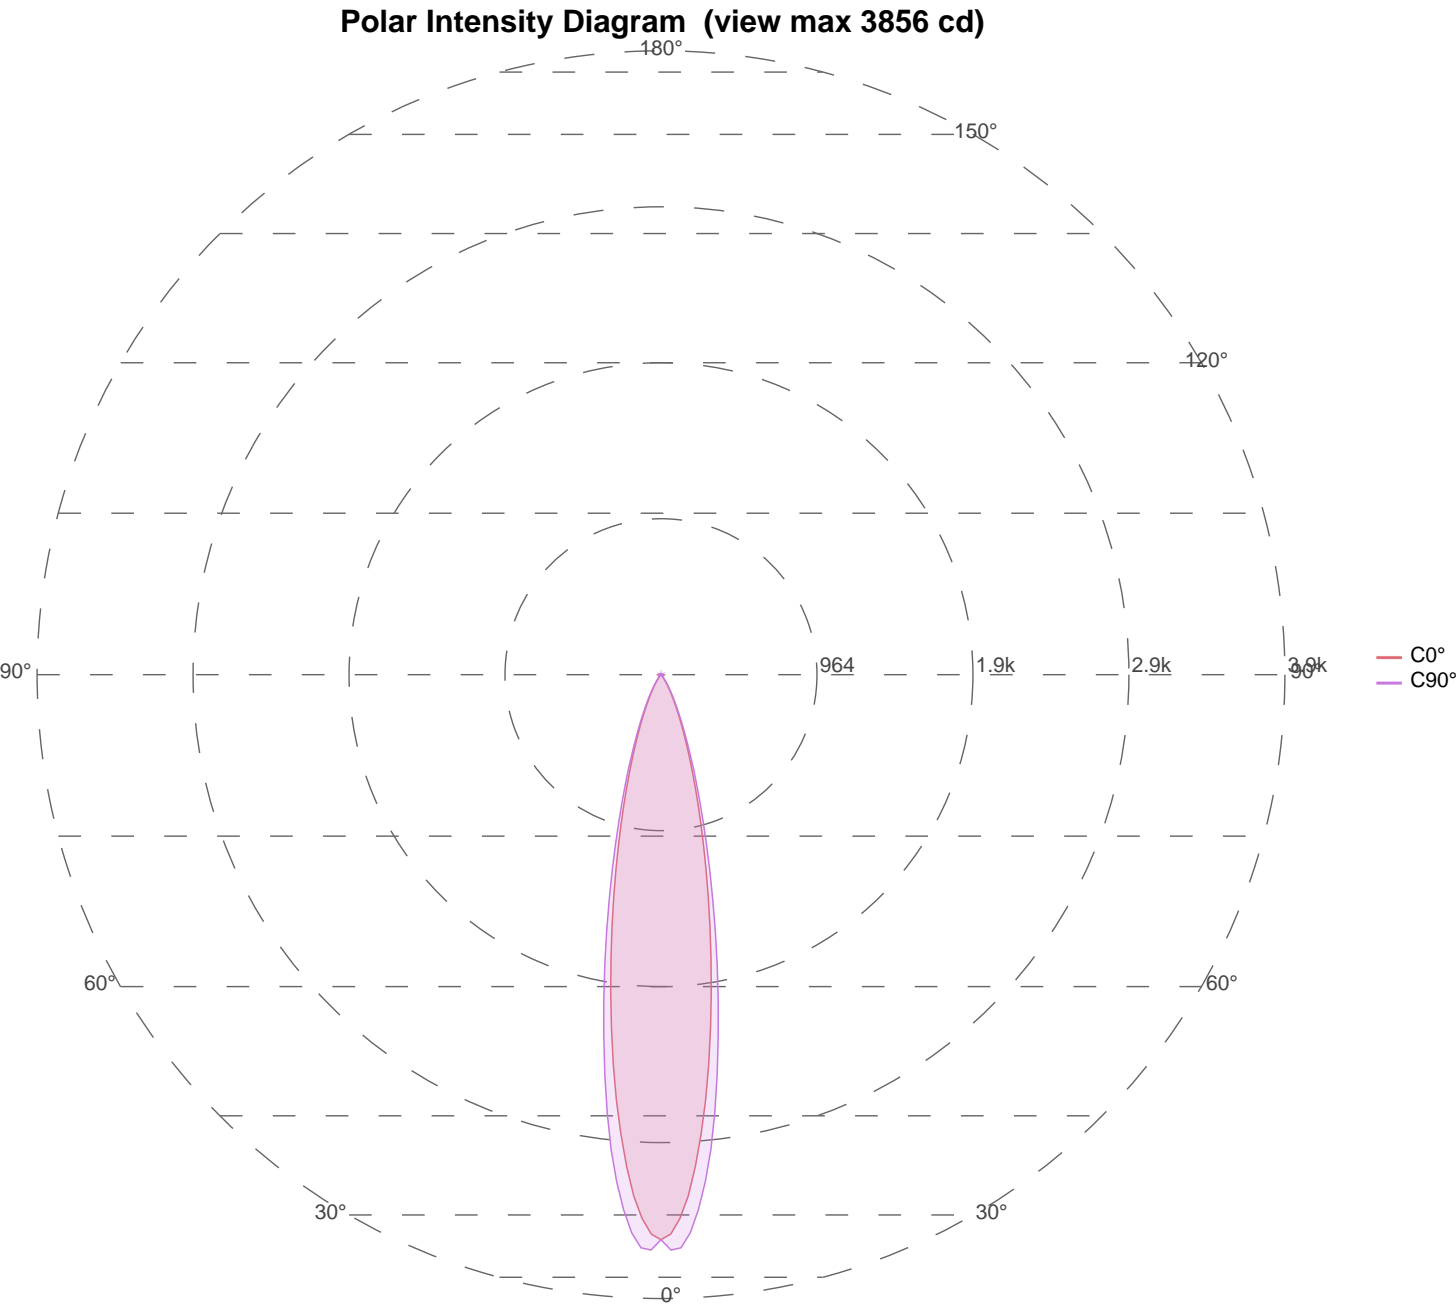

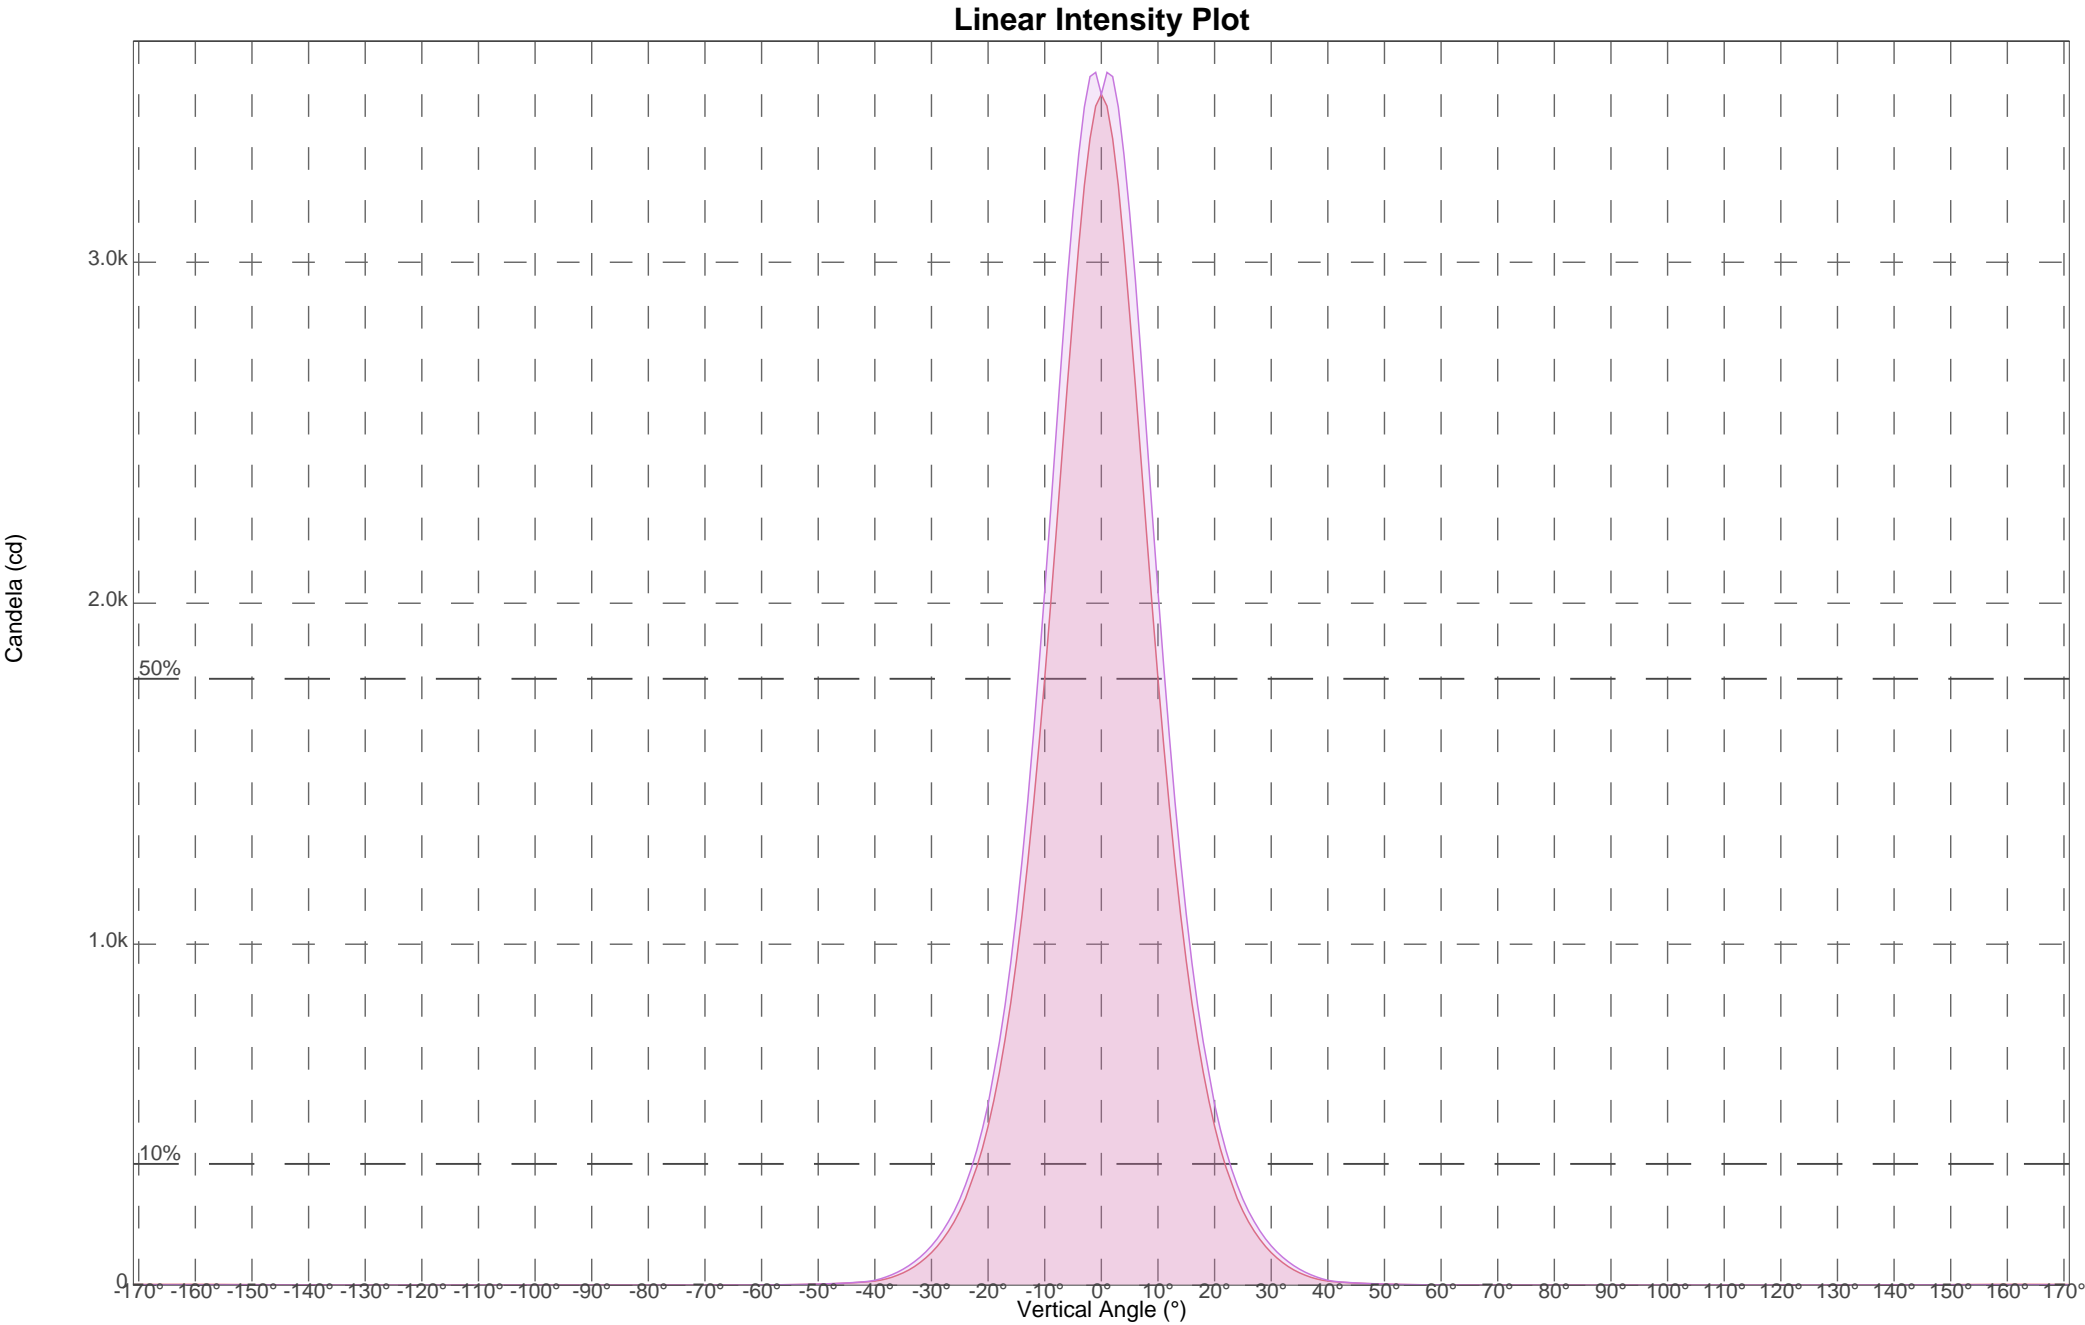

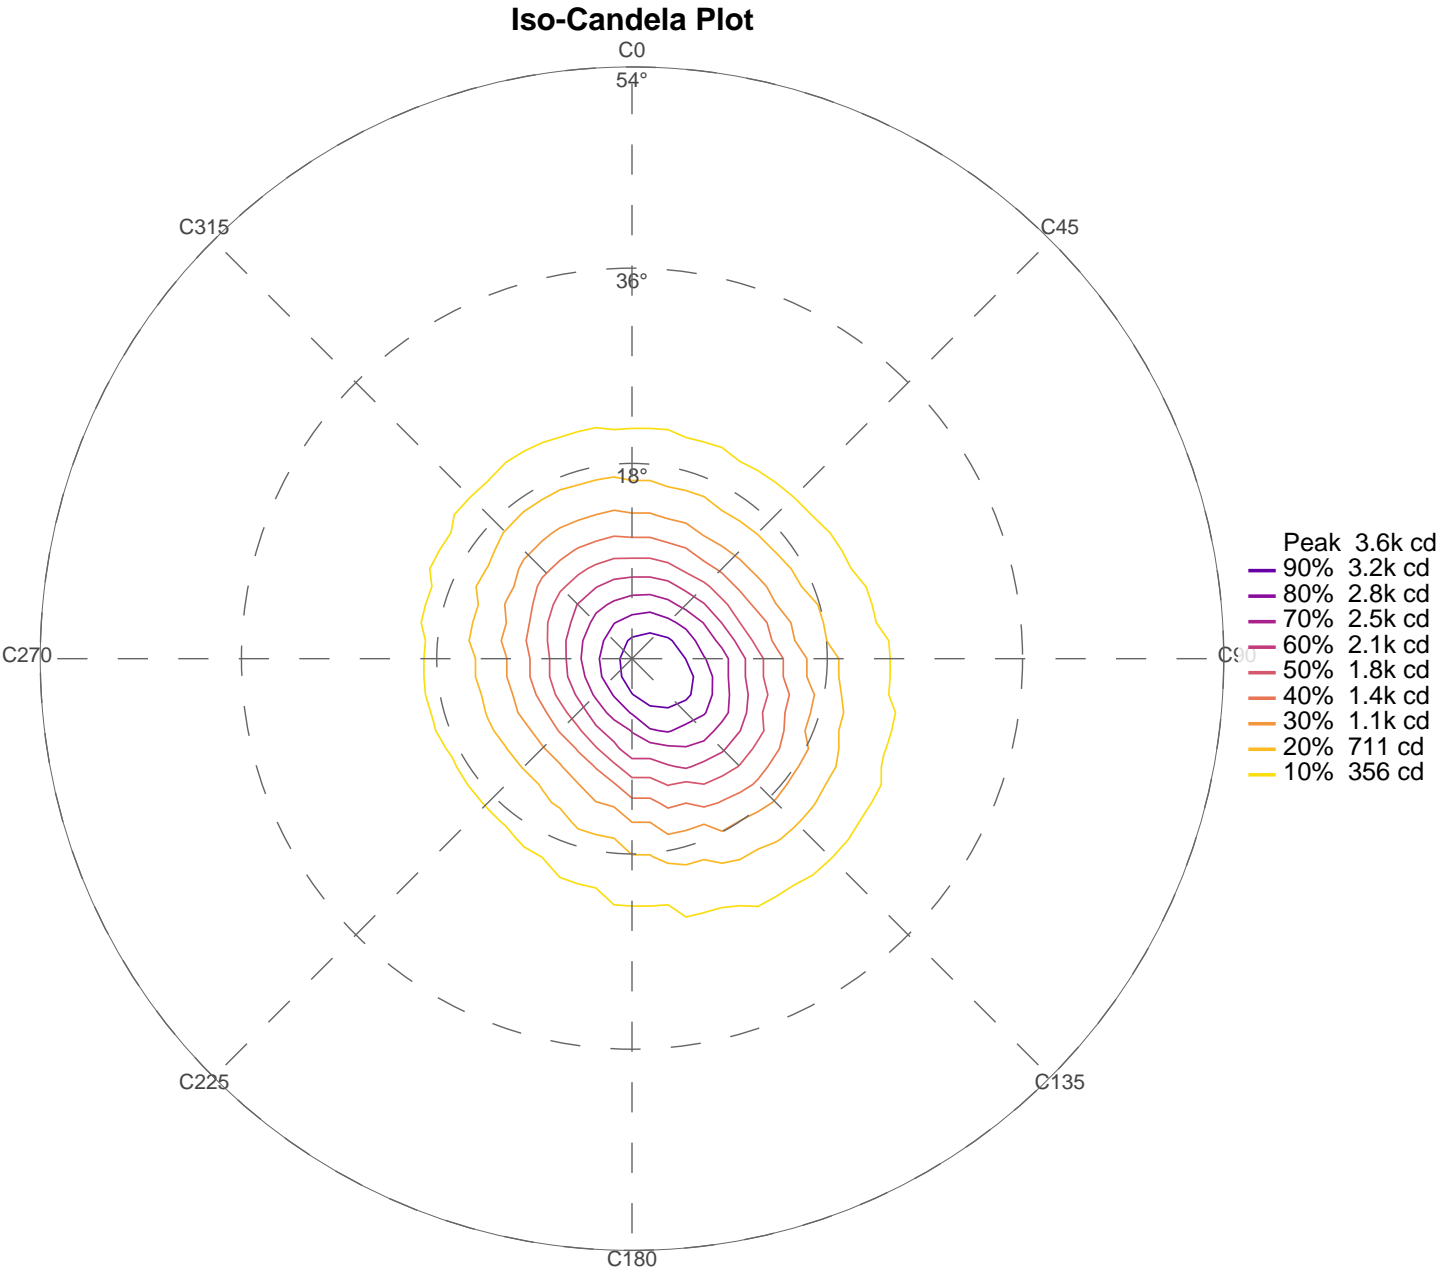


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	120.5 lx
Average	9.2 lx
Min	0.0 lx
Result grid	6 x 6 @ 1.0 m

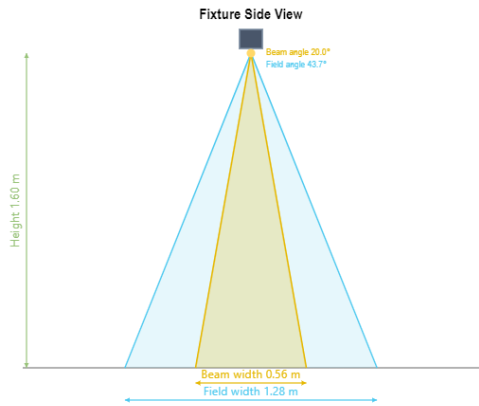

Iso-Illuminance

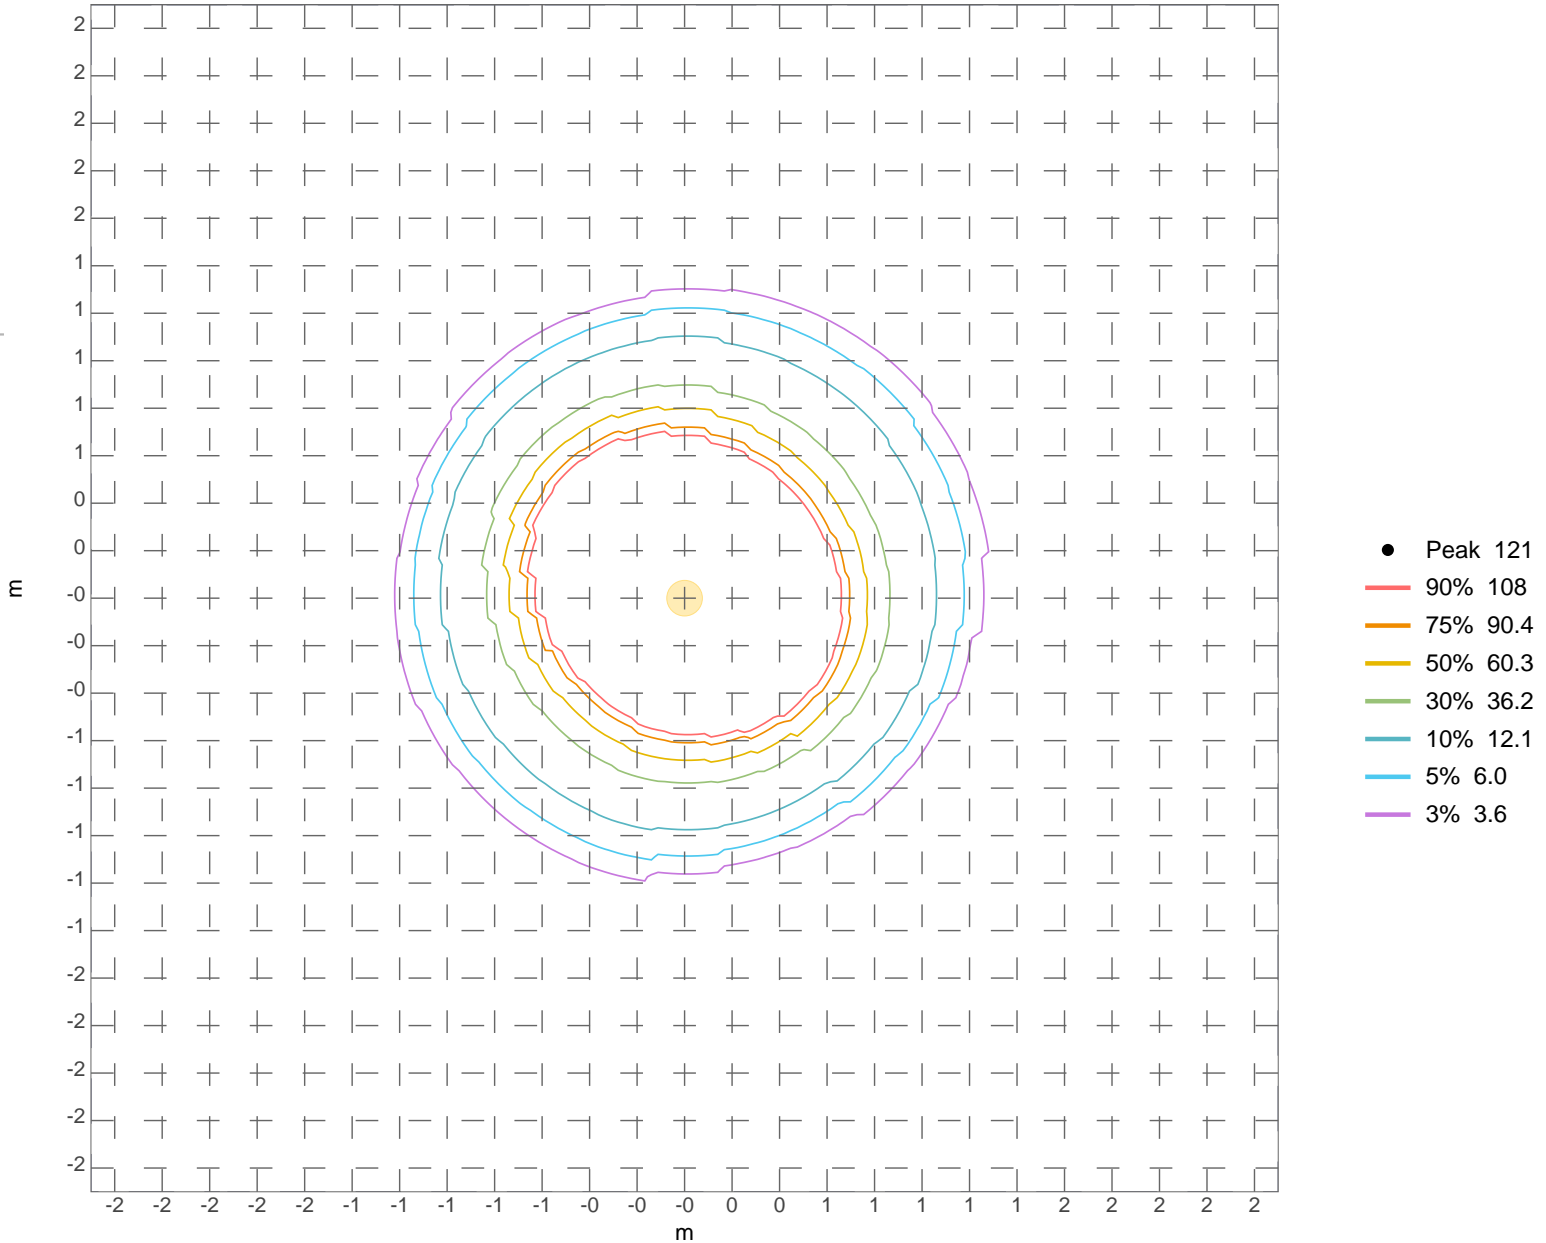

Beam Intensity

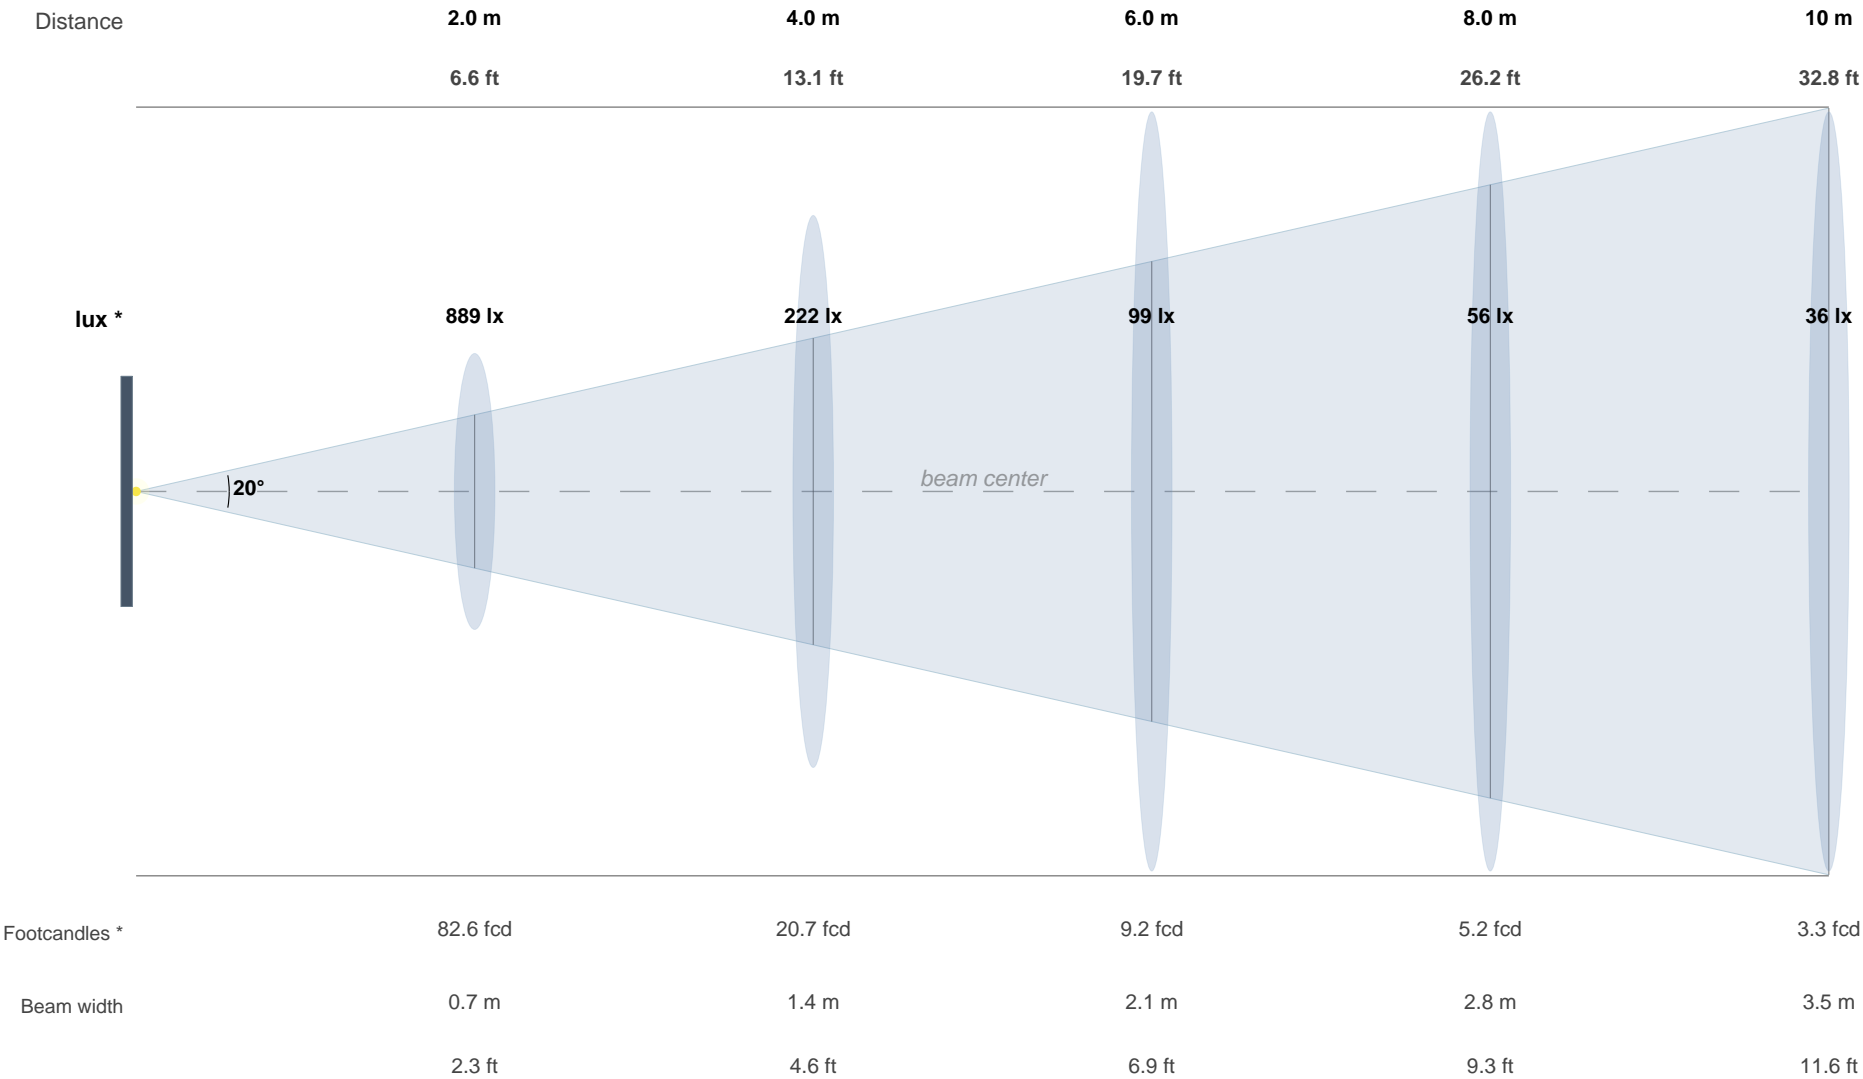

\* at beam centre