

# IES Photometric Report 2inspire 200

Chroma-Q\_2inspire\_200\_Extra\_Wide\_4800K\_PendantMount\_P1.IES



Generated: 5/4/2026 2:10:07 PM

Generated: 5/4/2026 2:10:07 PM

Fixture Information


Manufacturer	Chroma-Q	Max Candela	889.3 cd
Luminaire	LED Projector Luminaire at 4800K setting	Est. Total Lumens	1074 lm
Lamp	LEDs	Beam Angle (50%)	45.6°
Format	IESNA:LM-63-2002	Field Angle (10%)	139.0°
Wattage	33.7 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	1075 lm	Units	Meters
Num Lamps	1	W x L x H	-0.120 x -0.120 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	181 (0° – 180°)
H Angles	25 (0° – 360°)

IES Keywords

[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[TESTDATE]	30-06-2025
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-200_Extra_Wide_PendantMount(4800K)
[LUMINAIRE]	LED Projector Luminaire at 4800K setting
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	68.7
[_CURRENT]	0.49
[_WATTAGE]	33.7
[_PF]	0.56
[_THD]	0.0
[_LUMENS]	1074.5
[_EFFICACY]	31.86
[_STABILIZATION TIME]	70

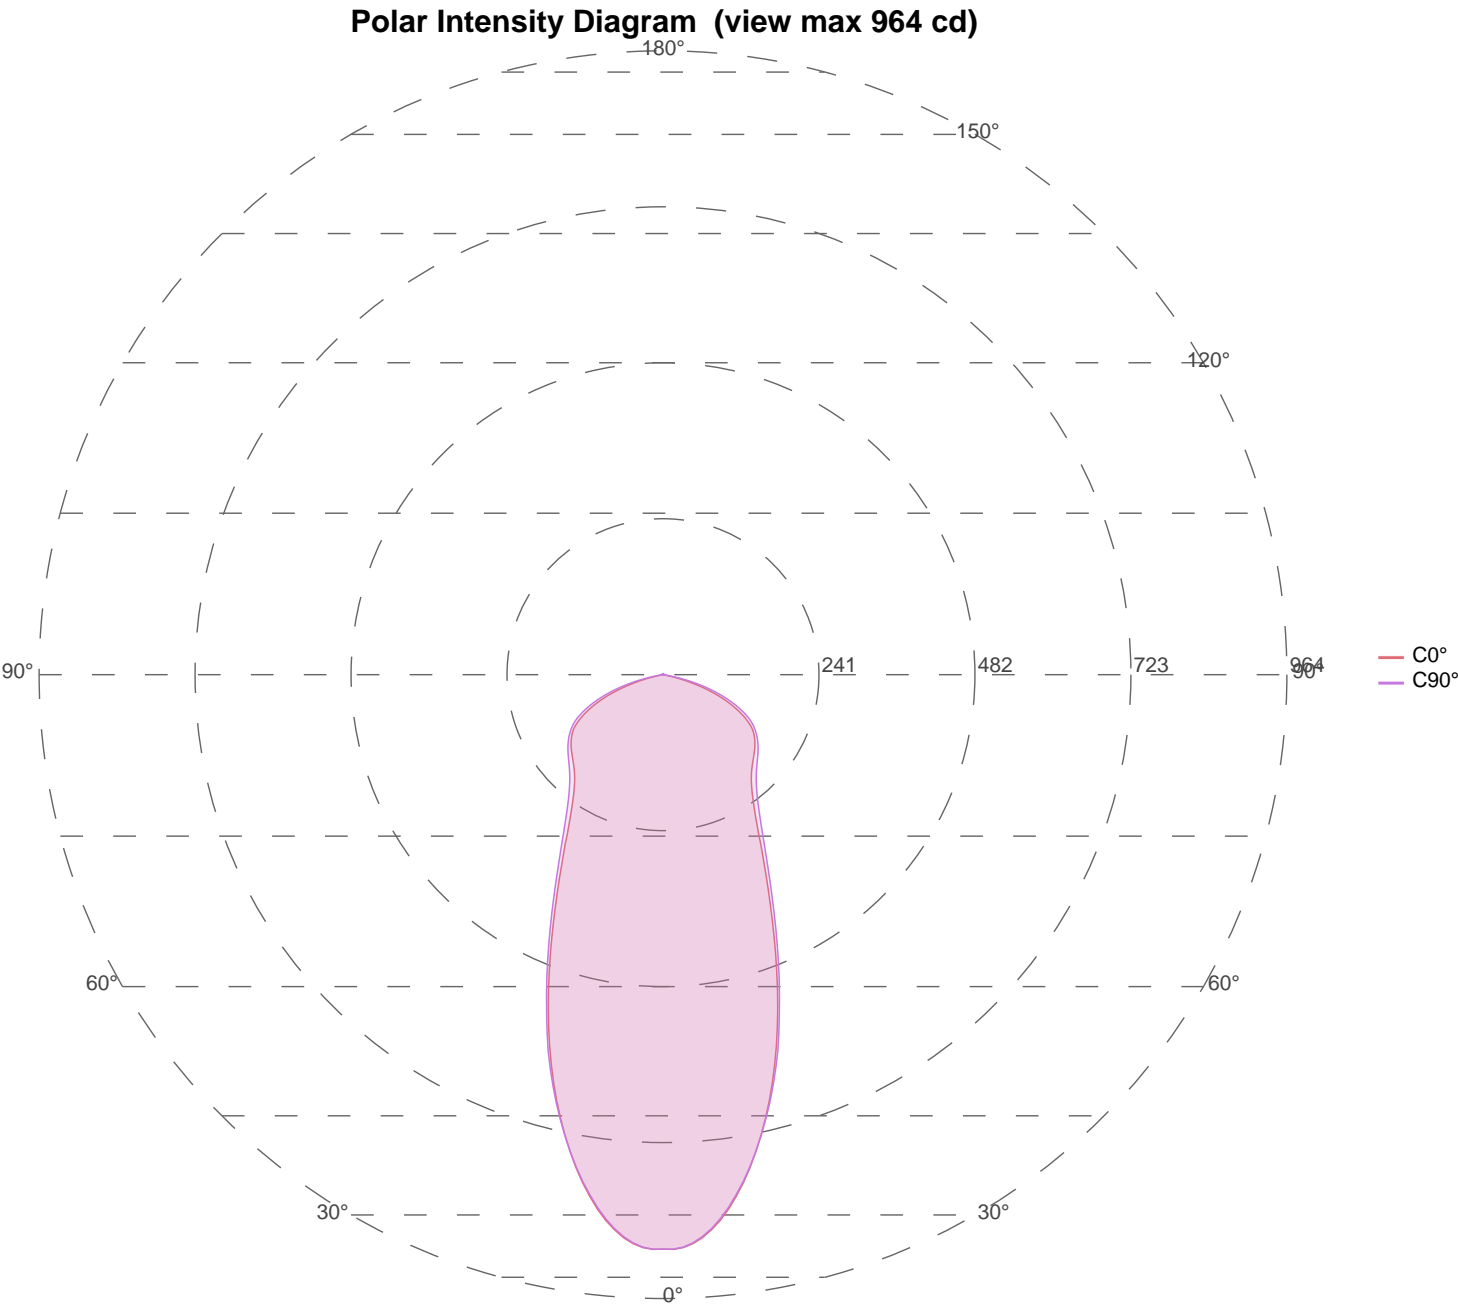

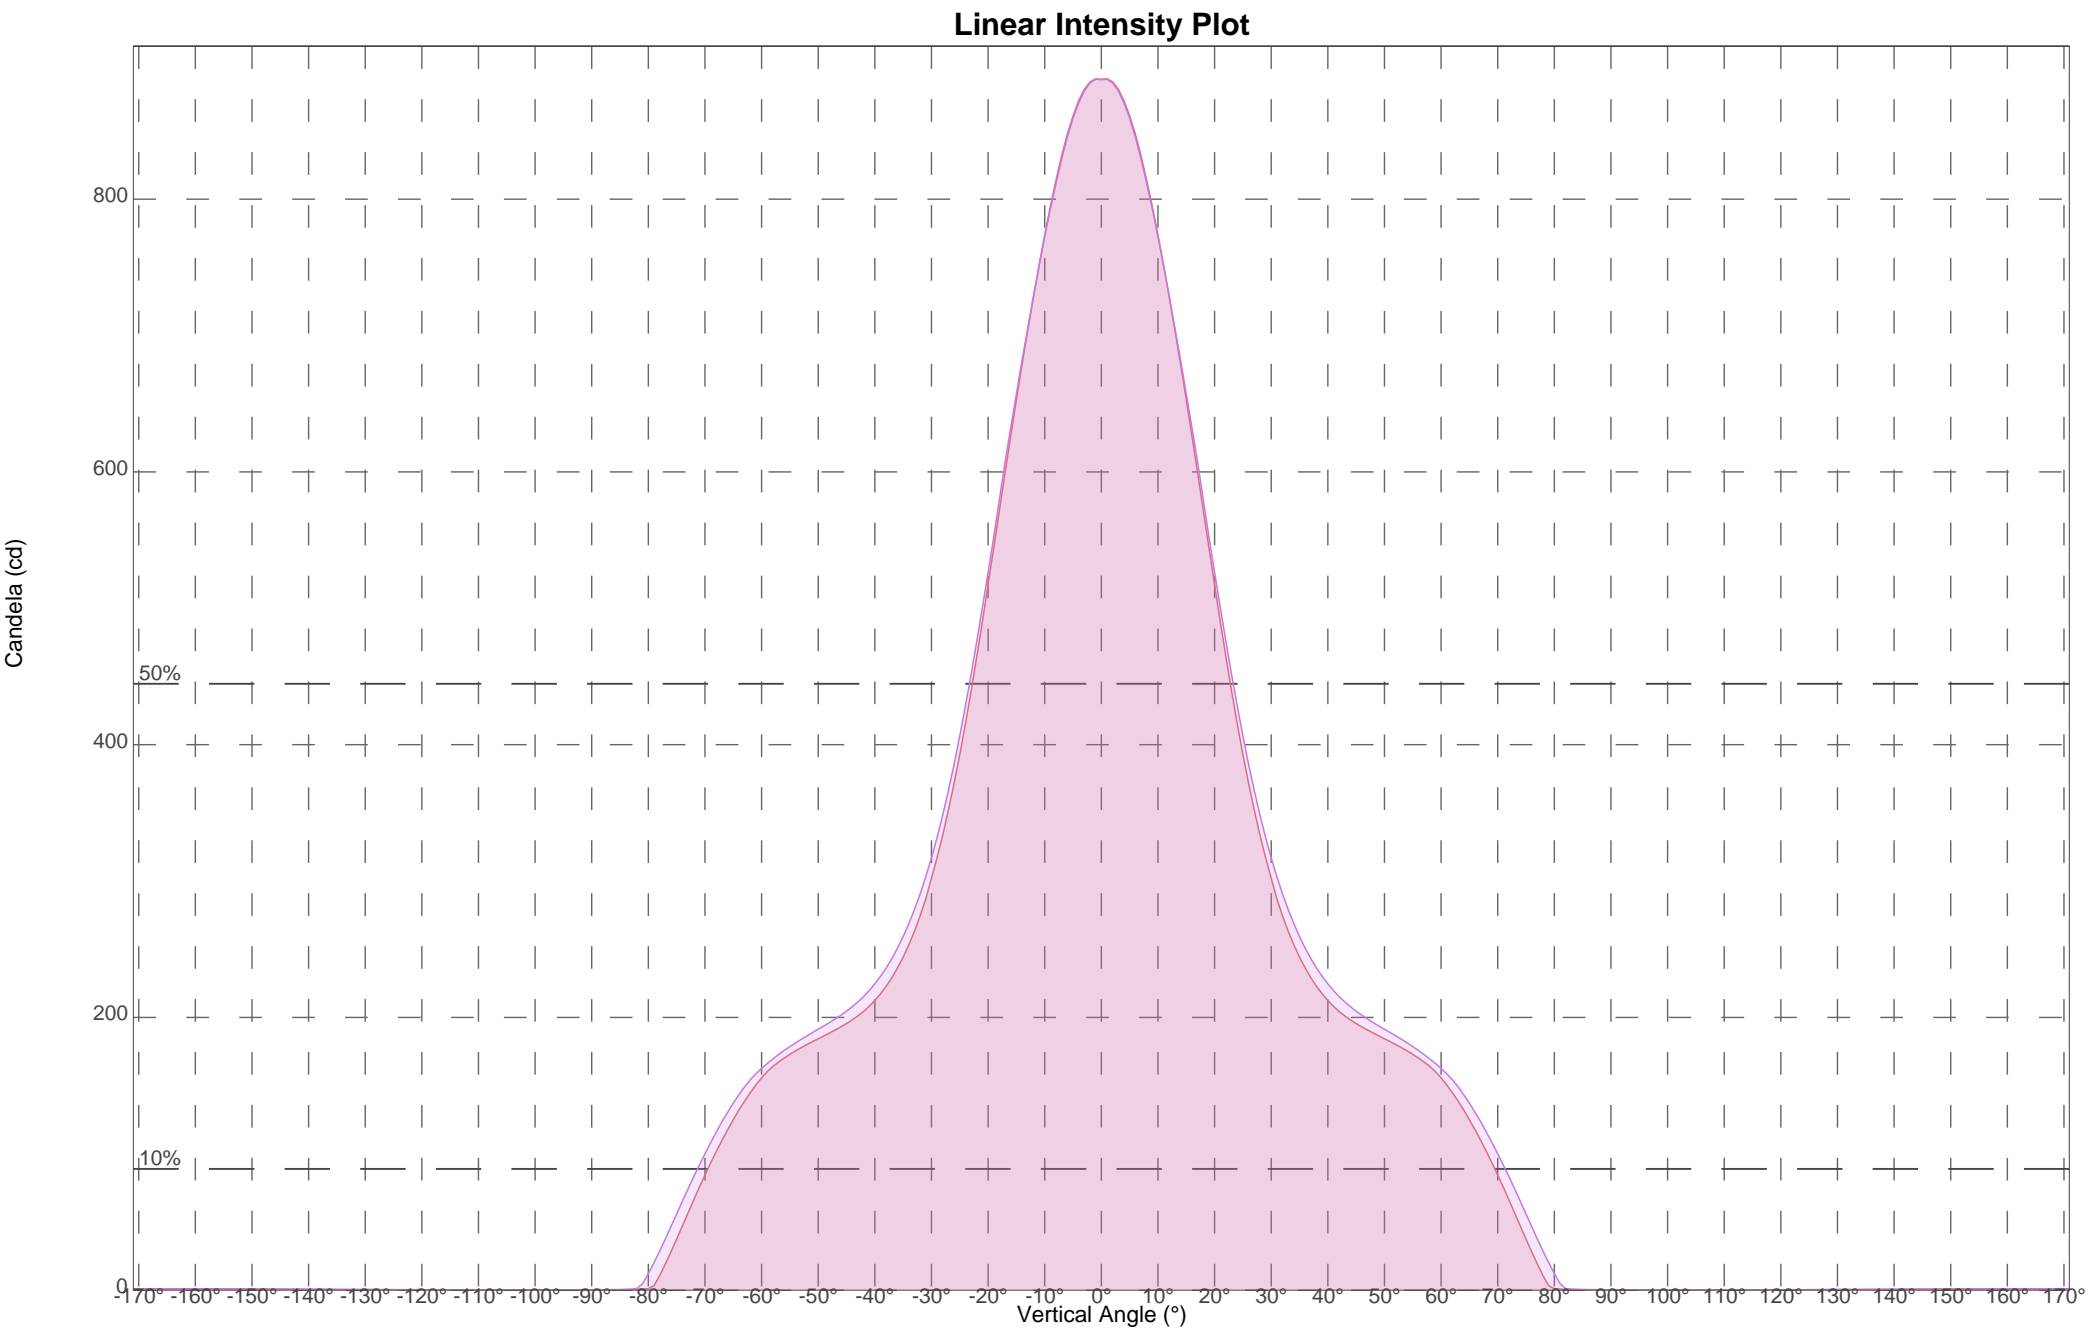

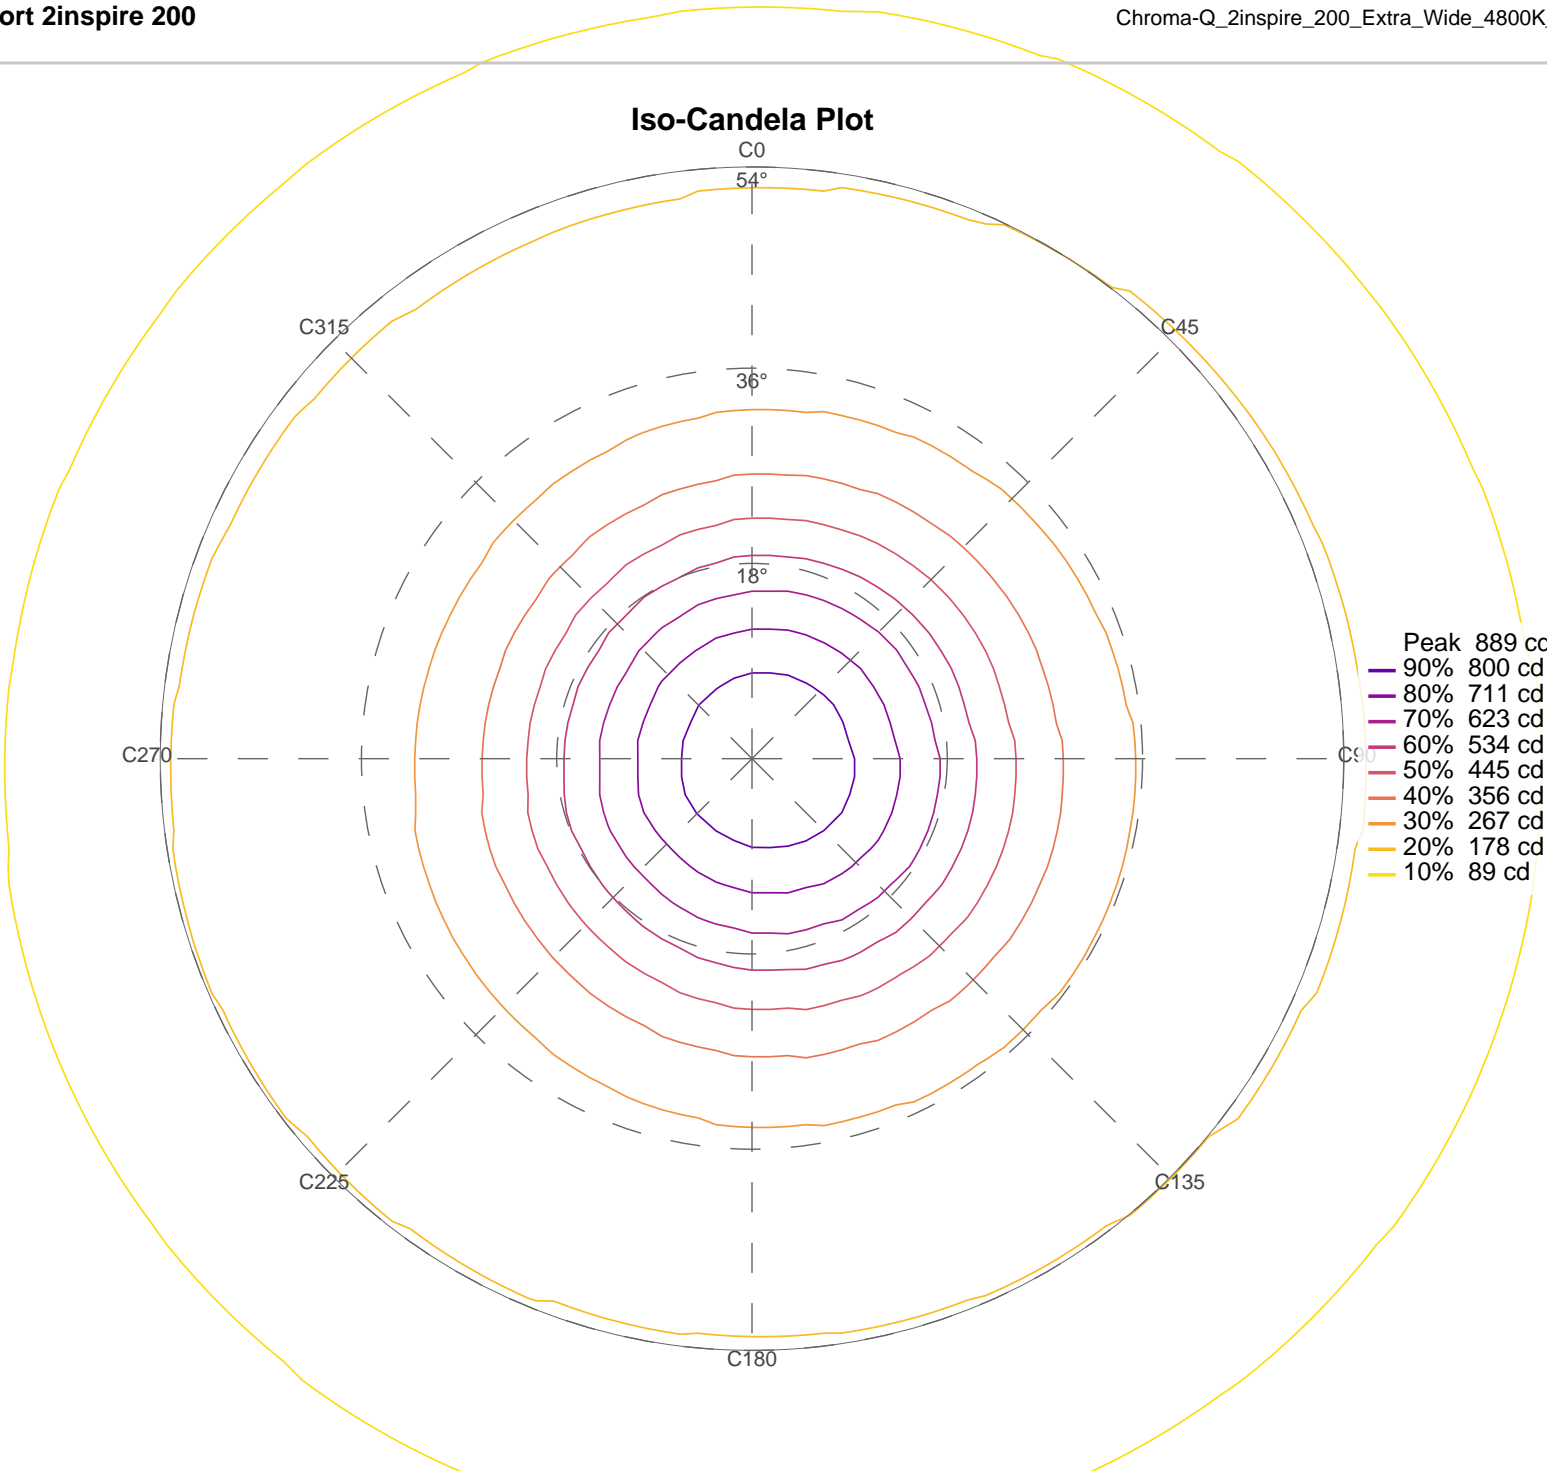


## Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

## Results


Peak	128.0 lx
Average	25.6 lx
Min	3.2 lx
Result grid	6 x 6 @ 1.0 m

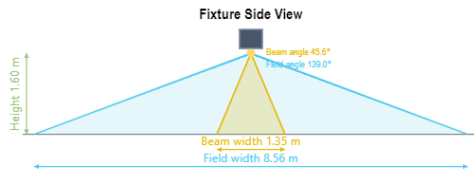

## Iso-Illuminance

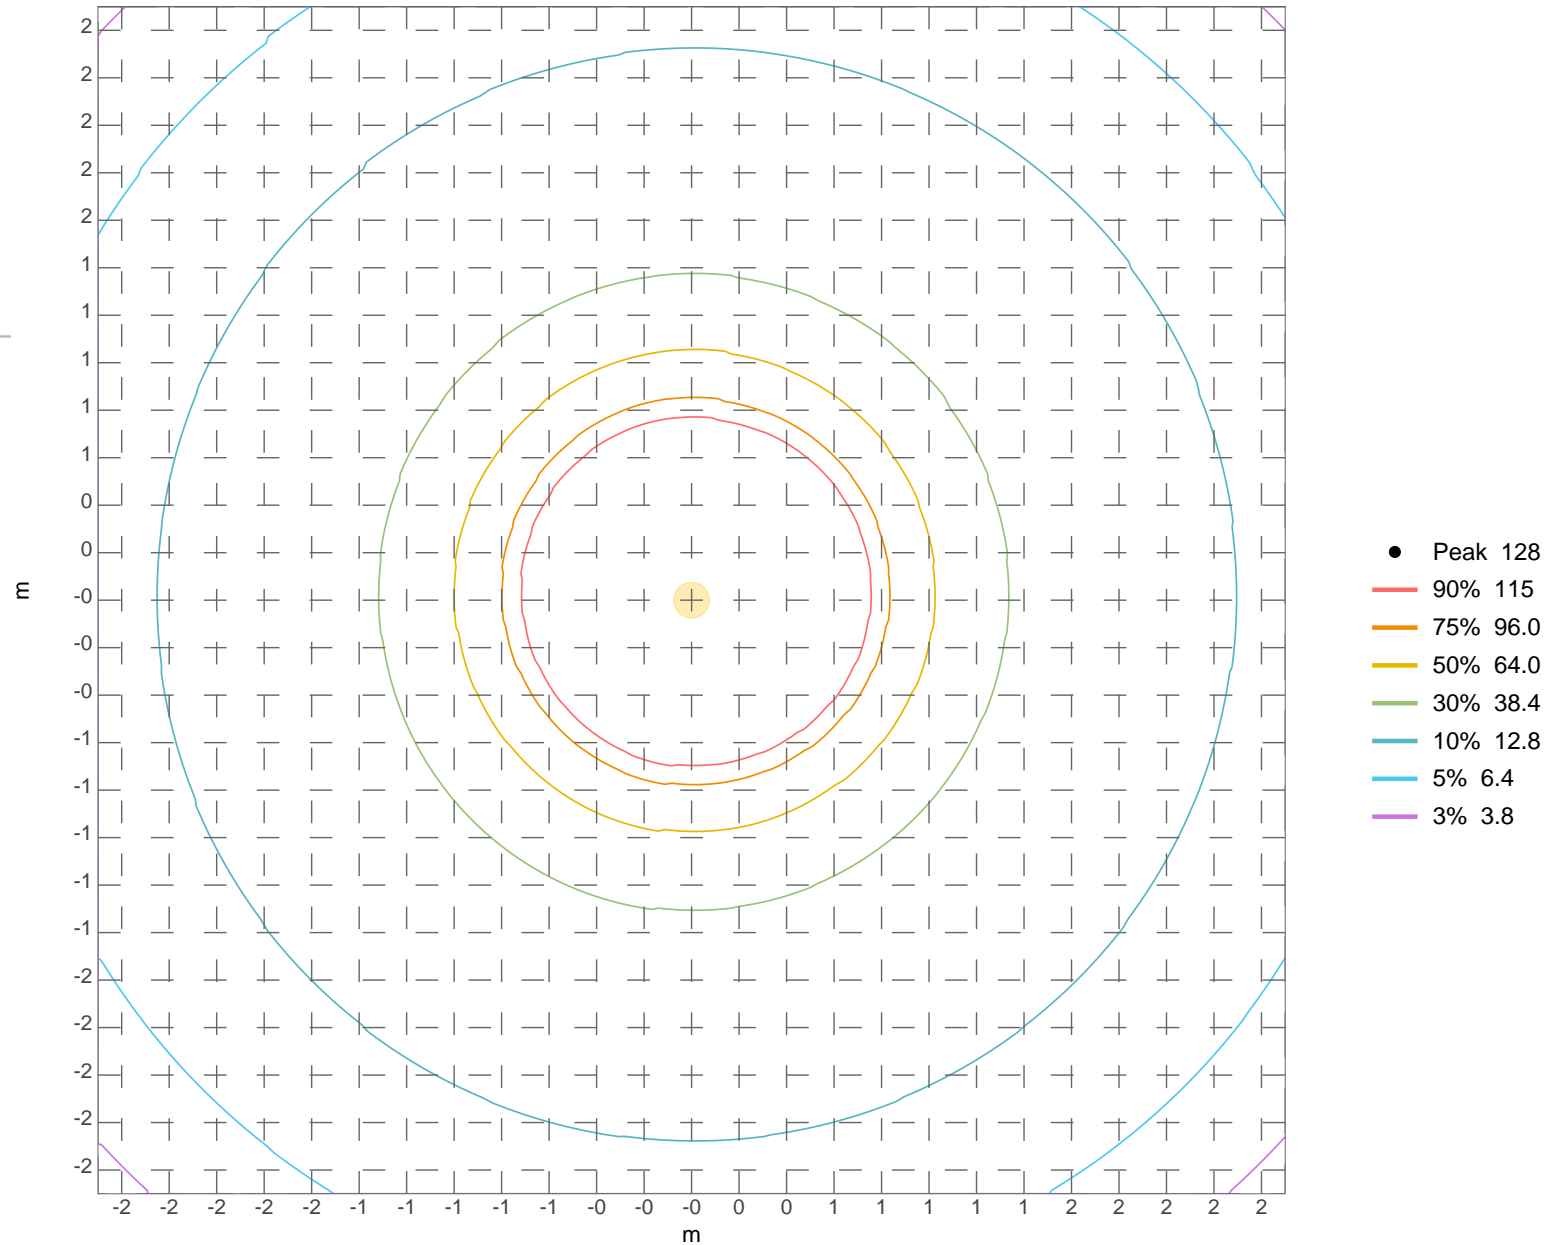

Beam Intensity

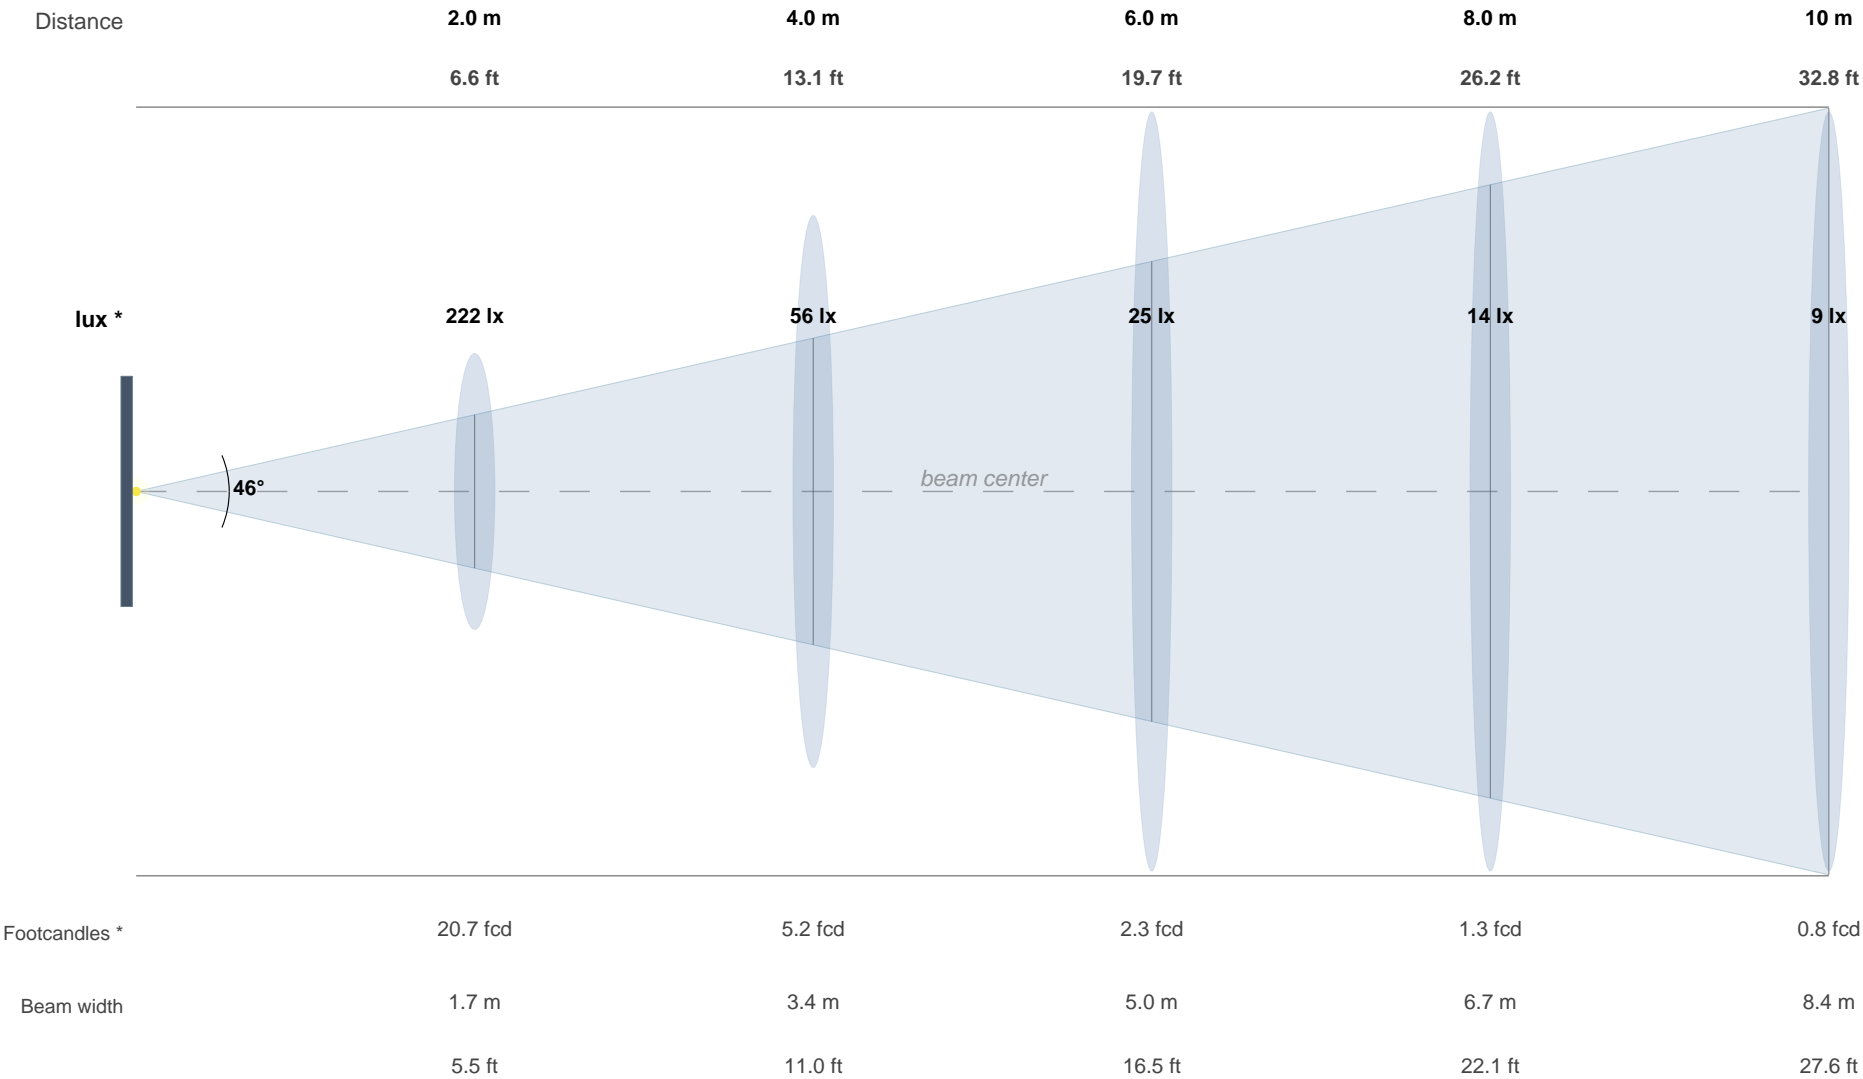

\* at beam centre