



Chroma-Q™ Color Block™ DB4 / Color Block 2 / 2 Plus 5-Way Power Supply

Part No: CHCBPSU05

S P E C I F I C A T I O N S H E E T

V 5.2

DESCRIPTION

The power supply shall provide power and effects for of up to 5 Color Block DB4 / Color Block 2 / Color Block 2 Plus or a combination of both.

The power supply shall be truss or 19" rack mountable.

The power supply shall feature a large backlit LCD display.

The power supply shall include built-in programming features.

The power supply shall work as a stand-alone unit.

The power supply shall feature a real time clock.

The power supply shall include 9 pre-programmed looks and store up to 42 custom looks on board.

The power supply shall feature 64 time triggers.

FEATURES


- Controls up to 5 Color Block DB4 / Color Block 2 / Color Block 2 Plus units
- 9 pre-programmed looks
- Time and day
- Program up to 64 time triggers to launch looks
- Stores up to 42 user programmed looks
- Synchronisation across power supply for the effects engine
- 15 control modes
- 3 grouping modes
- Magic Box™ enclosure - can be truss or 19" rack mounted
- Backlit LCD display

Please note:

As of March 2009, Color Block PSUs have been supplied with the version 2.* software required to access the full output and advanced functionality of the Color Block 2 fixture. Previous PSU30 and PS05B (Magic box design) are upgradable for a nominal charge.

OVERALL SPECIFICATIONS

Net dimensions	Width (A): 219mm / 8.6" Height (B): 88mm / 3.5" Depth (C): 279mm / 11"
Net weight:	3.9kg / 8.6lbs
Shipping dimensions:	Width: 250mm / 14.5" Height: 125mm / 7.5" Depth: 300mm / 3"
Shipping weight:	4.2kg / 9.2lb
Power:	100-240V AC 50/60Hz
Power consumption:	4A @ 120V AC; 2A @ 240V AC
DMX connector:	XLR-5 male in XLR-5 female thru
Control:	ANSI E1.11 USITT DMX 512-A
Power connector:	IEC
Colour:	Black powder coated paint
IP rating:	IP20

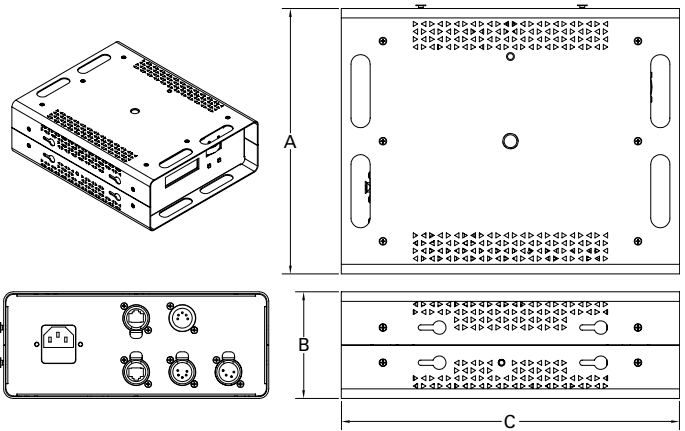

ORDERING INFORMATION

Model
Chroma-Q Power Supply for up to 5
Color Block DB4 / Color Block 2 /
Color Block 2 Plus units

Part No
CHCBPSU05

