

IES Photometric Report 2inspire 300

Chroma-Q_2inspire_300_Narrow_4800K.IES



Generated: 5/4/2026 1:39:06 PM

Generated: 5/4/2026 1:39:06 PM

Fixture Information


Manufacturer	Chroma-Q	Max Candela	8008.5 cd
Luminaire	LED Projector Luminaire at 4800K setting	Est. Total Lumens	3363 lm
Lamp	LEDs	Beam Angle (50%)	25.5°
Format	IESNA (unknown version)	Field Angle (10%)	64.2°
Wattage	60.0 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	Absolute	Units	Feet
Num Lamps	1	W x L x H	-0.354 x -0.354 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	73 (0° – 180°)
H Angles	17 (0° – 360°)

IES Keywords

[TEST]	P181C
[TESTLAB]	Lumentra
[ISSUEDATE]	Nov 28, 2023
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-300 (4800K)
[LUMINAIRE]	LED Projector Luminaire at 4800K setting
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	52.64
[_CURRENT]	1.14
[_WATTAGE]	60
[_PF]	1.0
[_THD]	0.0
[_LUMENS]	3386
[_EFFICACY]	56.43
[_STABILIZATION TIME]	70

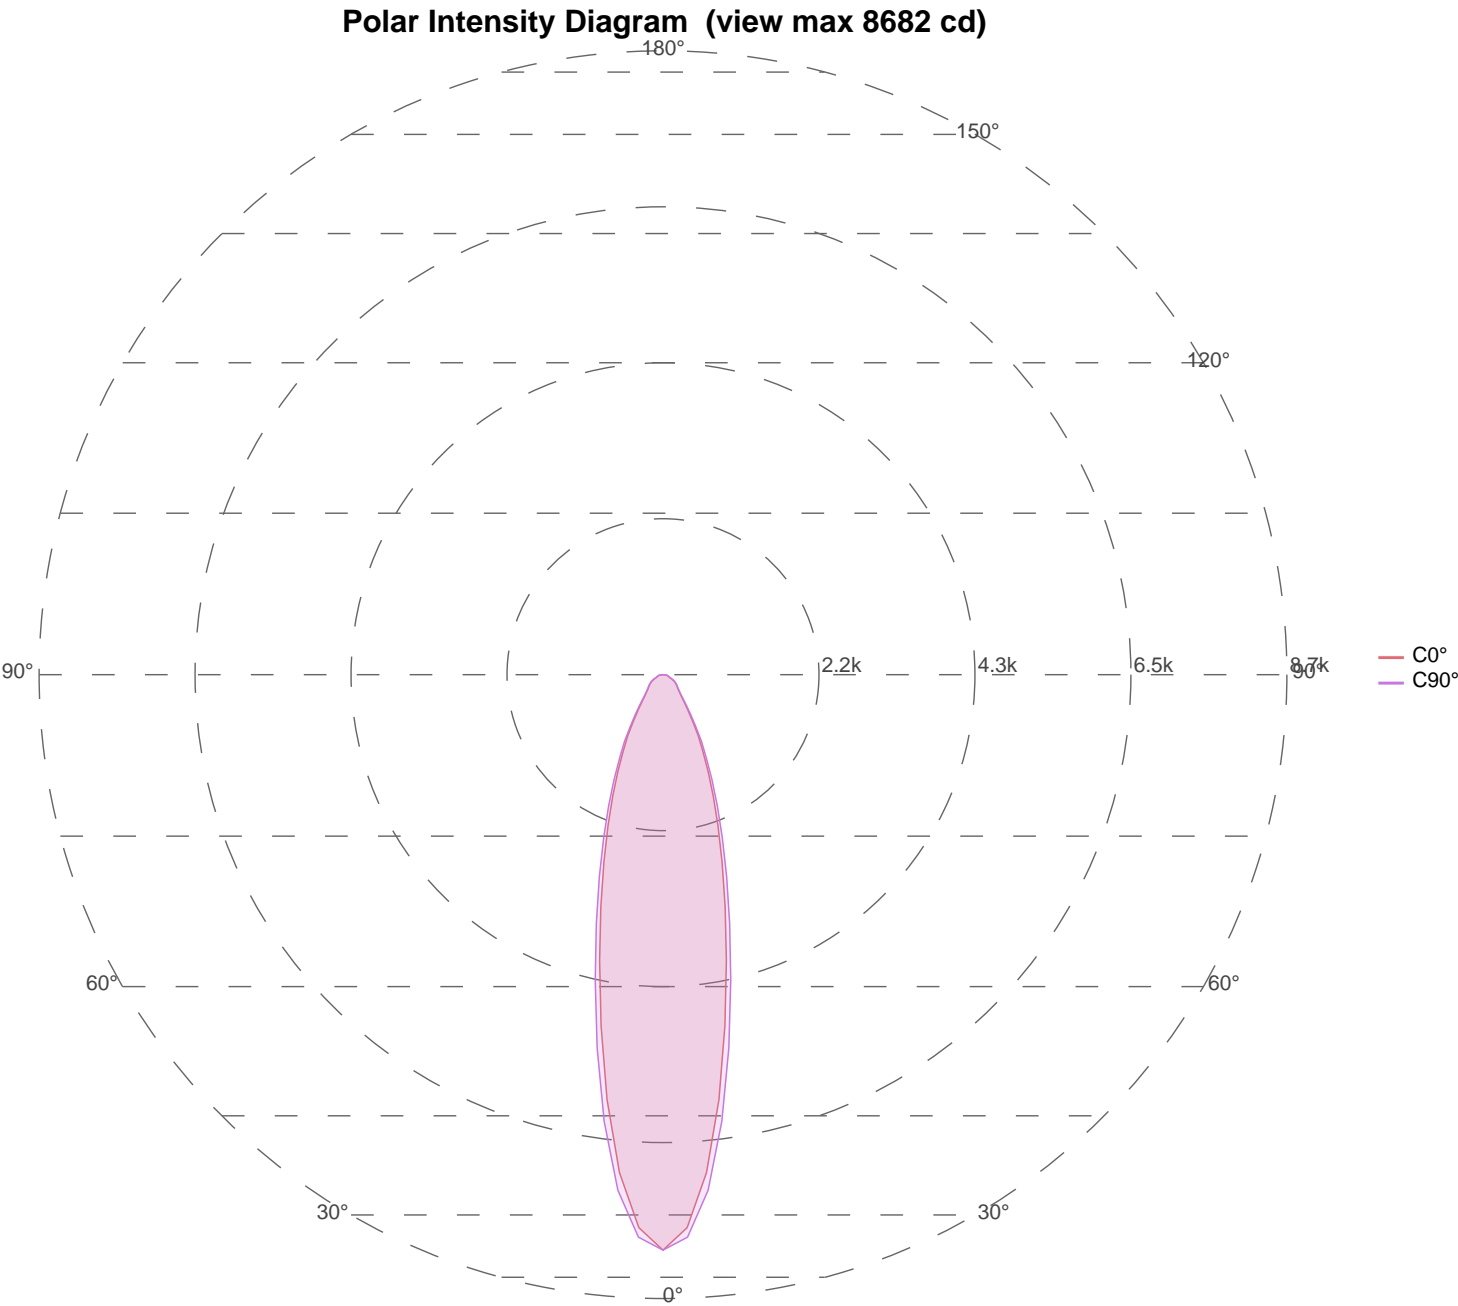

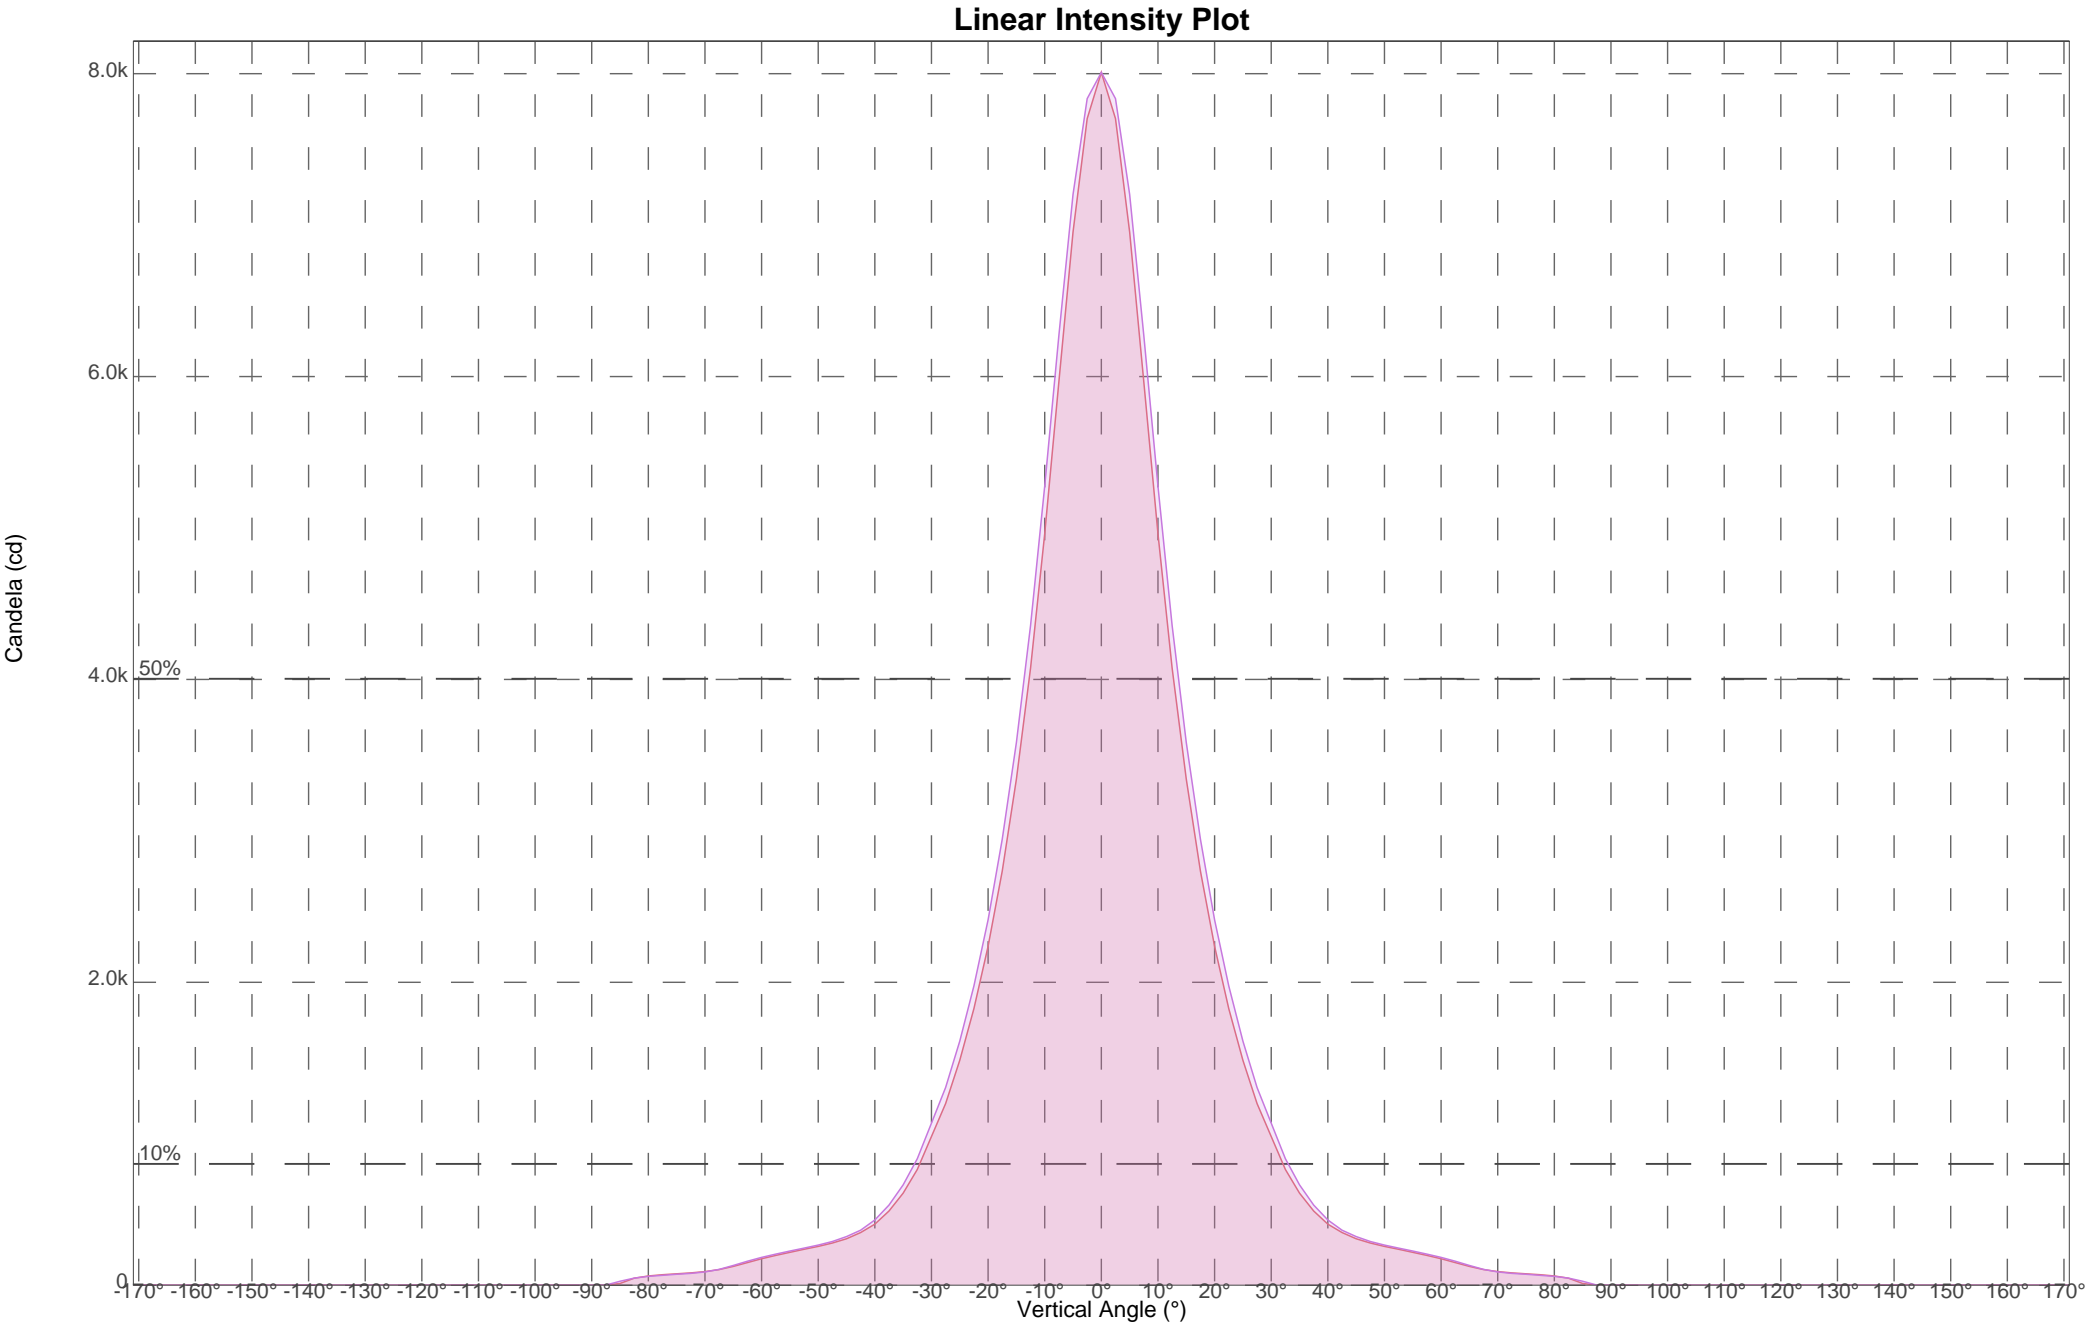

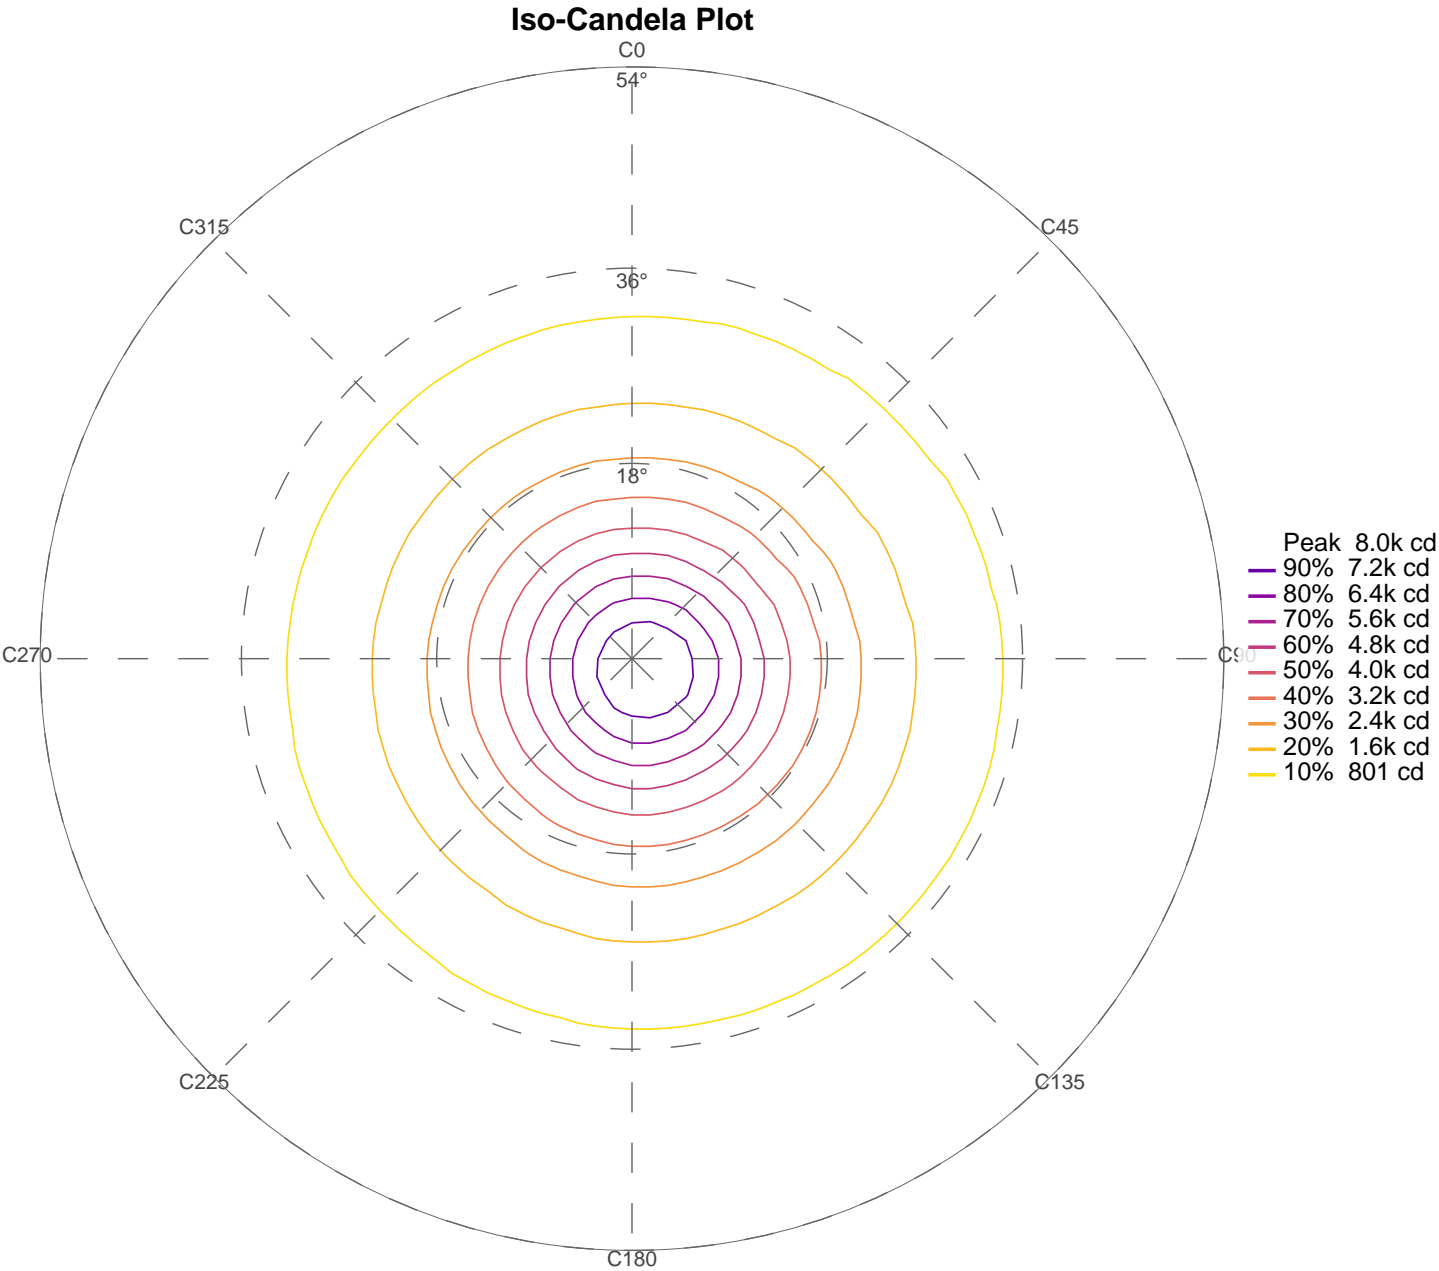


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	532.8 lx
Average	73.8 lx
Min	3.1 lx
Result grid	6 x 6 @ 1.0 m

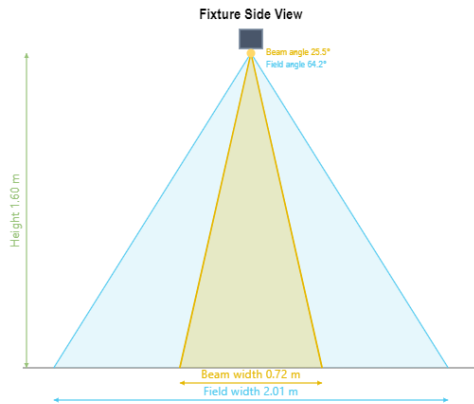

Iso-Illuminance

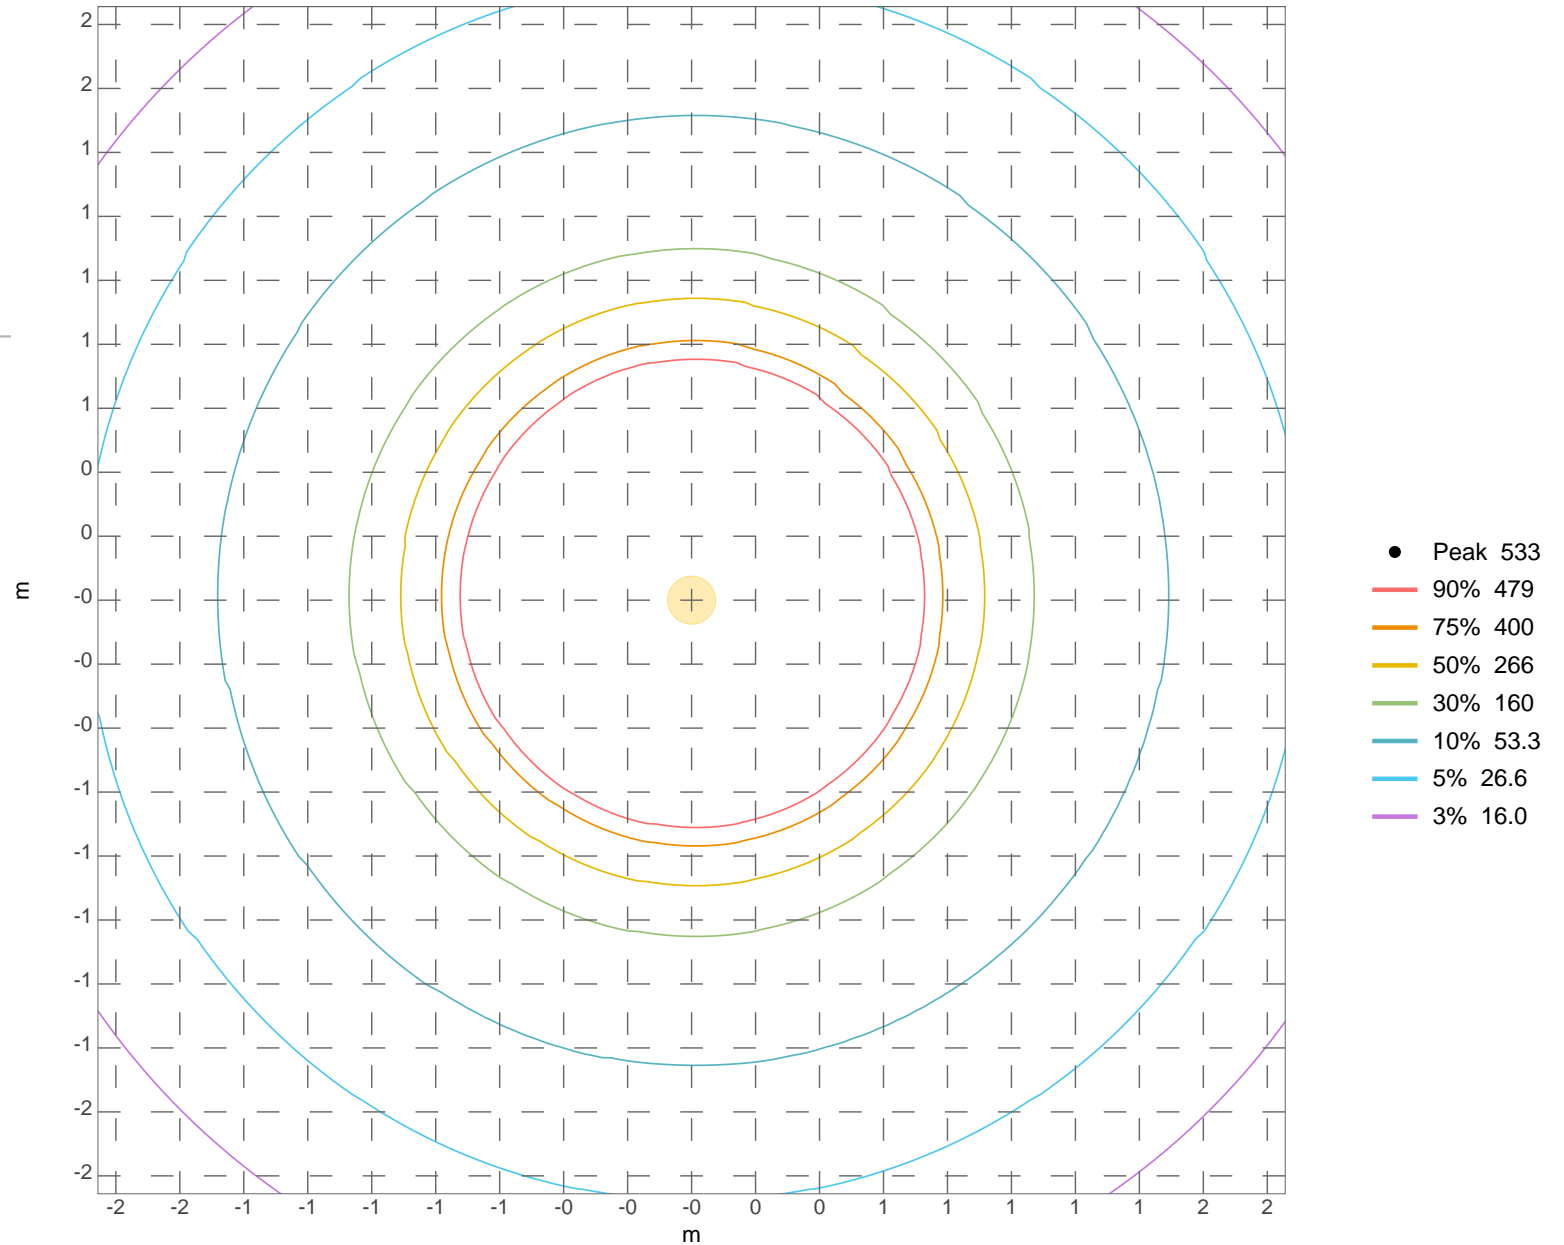

Beam Intensity

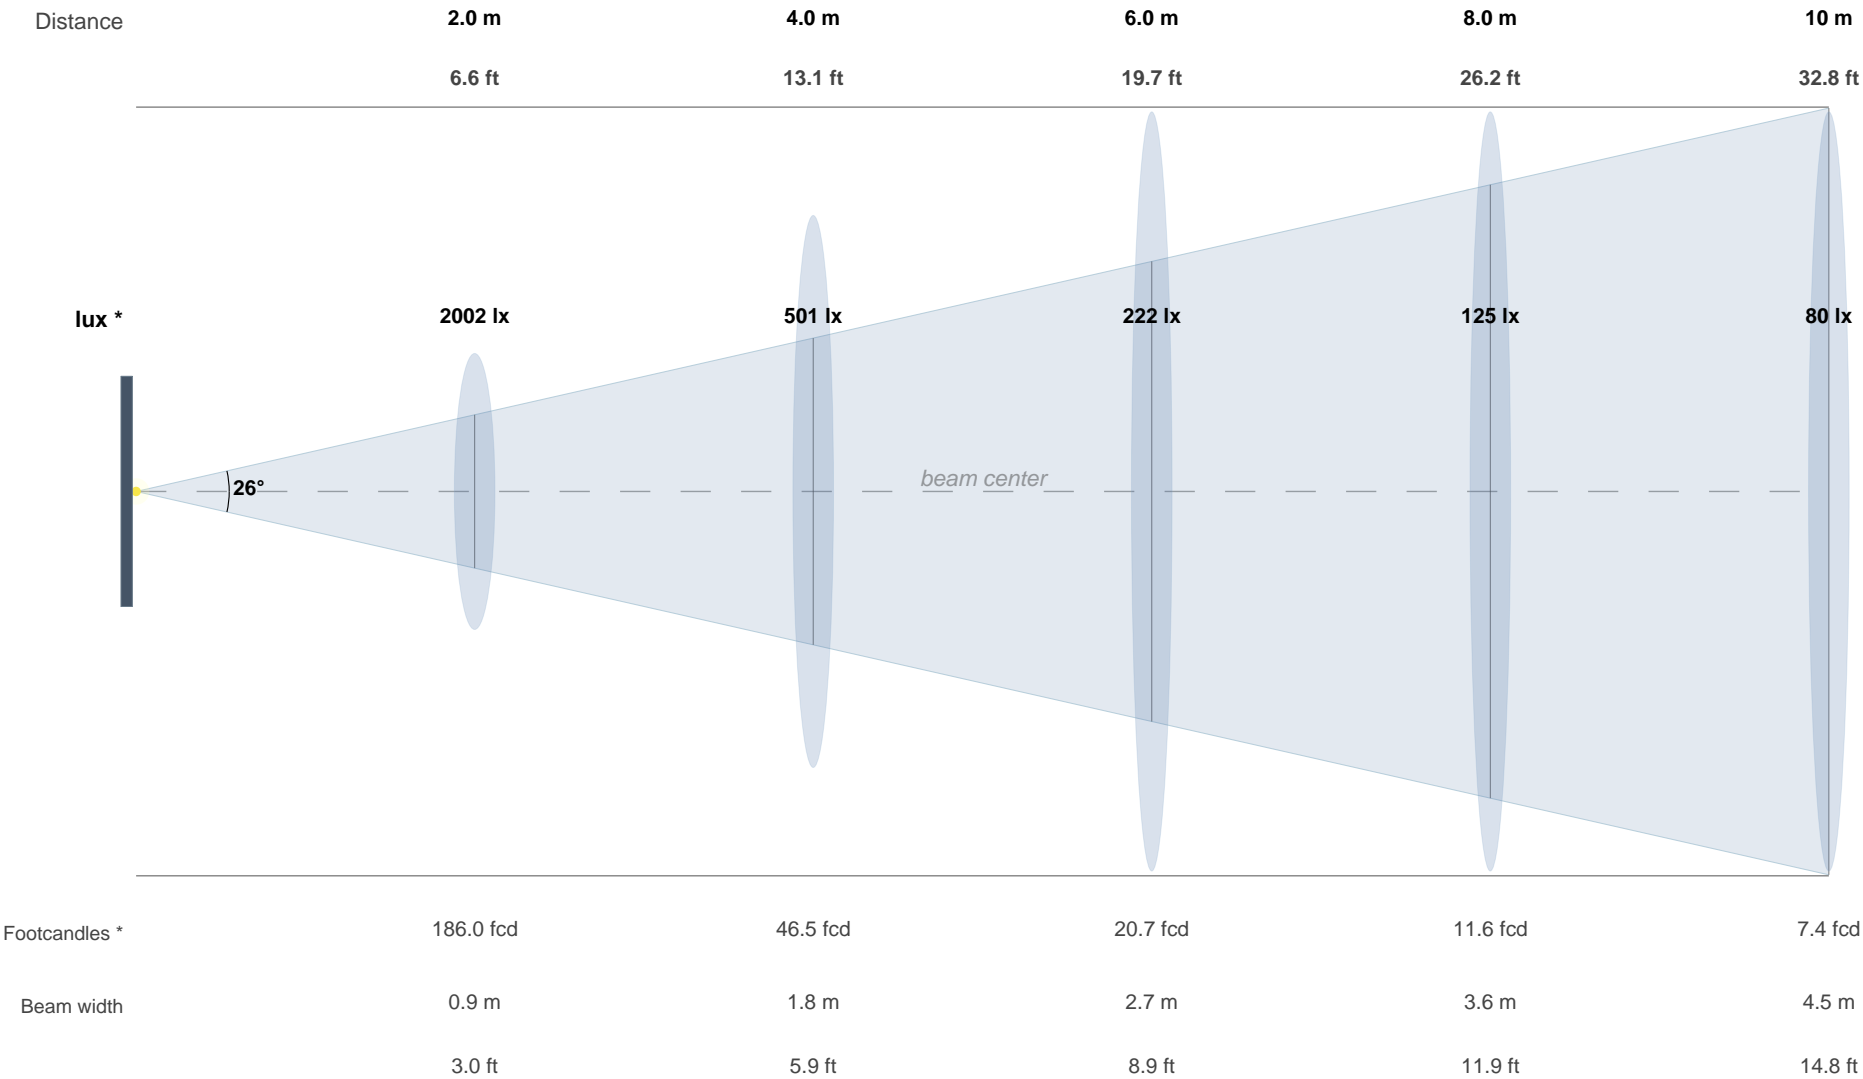

* at beam centre