

IES Photometric Report 2inspire 300

Chroma-Q_2inspire_300_Narrow_YELLOW.IES



Generated: 5/4/2026 1:39:08 PM

Generated: 5/4/2026 1:39:08 PM

Fixture Information

Manufacturer	Chroma-Q	Max Candela	4901.8 cd
Luminaire	2inspire-POE 300 Narrow w/o Diffusion (Yellow)	Est. Total Lumens	1970 lm
Lamp	LEDs	Beam Angle (50%)	28.7°
Format	IESNA:LM-63-2002	Field Angle (10%)	64.7°
Wattage	26.6 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	Absolute	Units	Feet
Num Lamps	1	W x L x H	-0.354 x -0.354 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	91 (0° – 90°)
H Angles	145 (0° – 360°)


IES Keywords

[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[ISSUEDATE]	2024-01-15
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-300 Narrow (Yellow)
[LUMINAIRE]	2inspire-POE 300 Narrow w/o Diffusion (Yellow)
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	53.73
[_CURRENT]	0.497
[_WATTAGE]	26.6
[_PF]	1.0
[_THD]	0.0
[_LUMENS]	1971
[_EFFICACY]	74.1
[_STABILIZATION TIME]	70

Polar Intensity Diagram (view max 5314 cd)

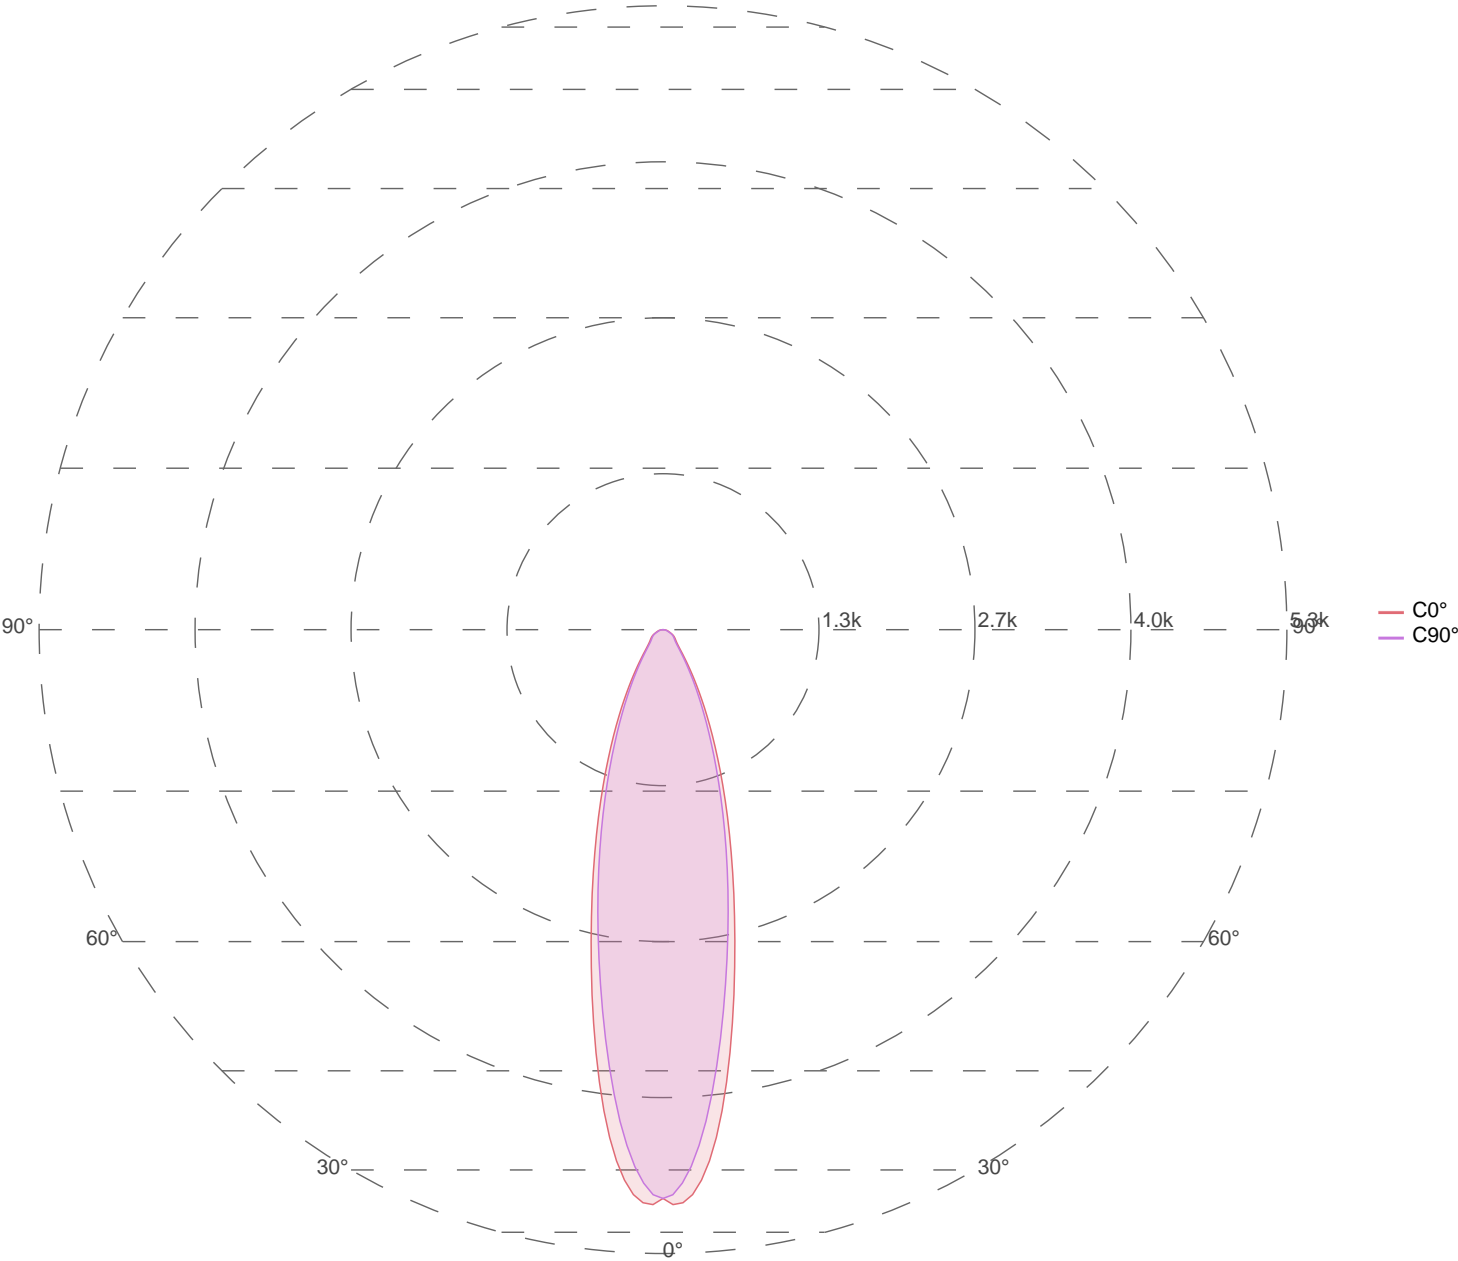

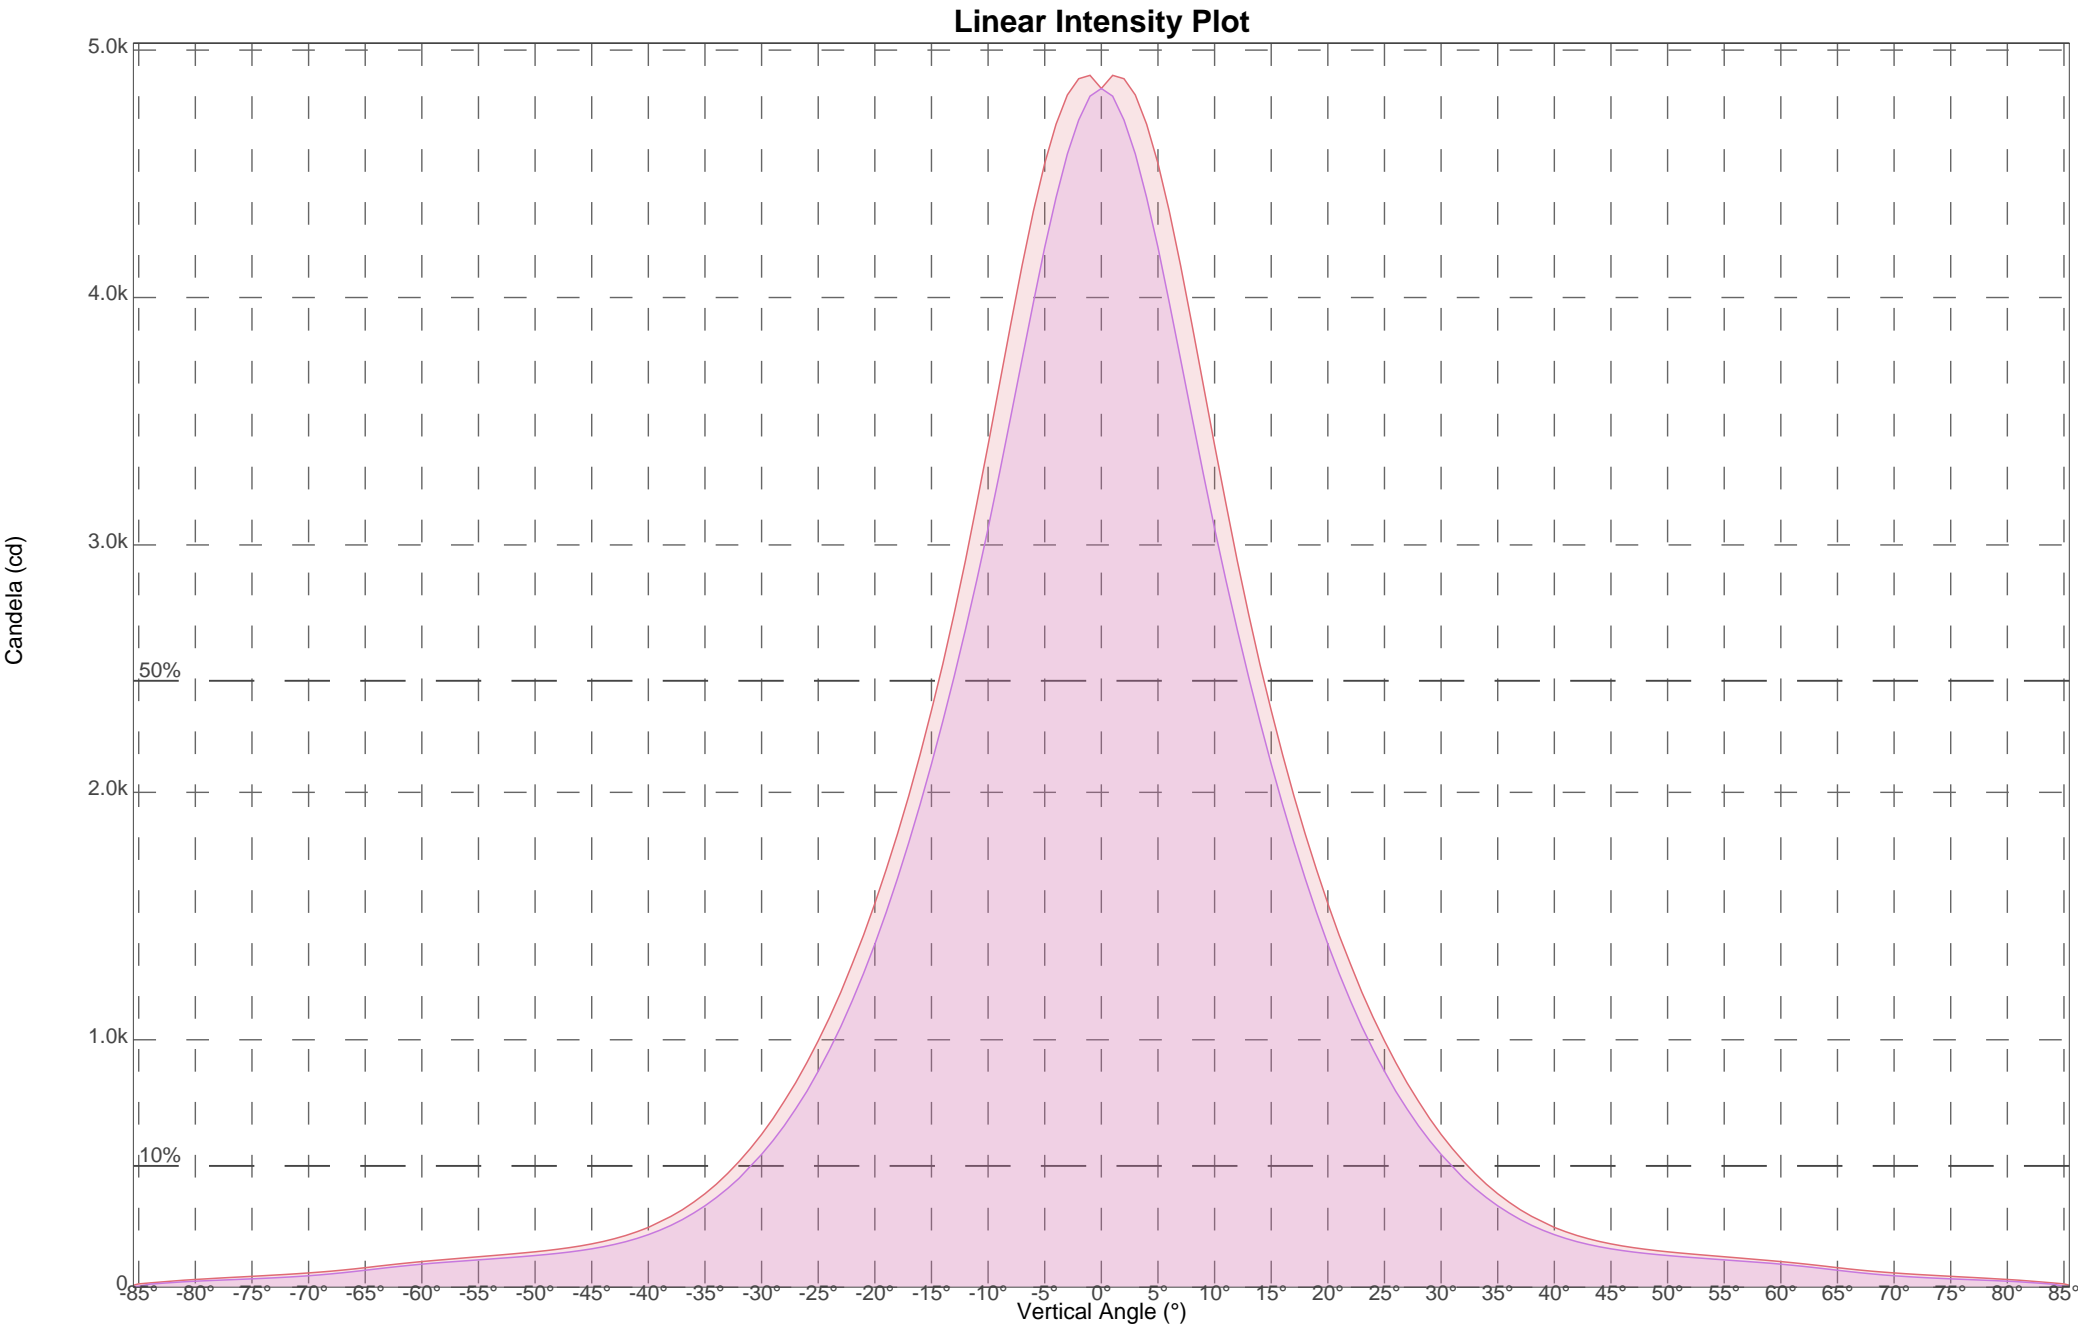

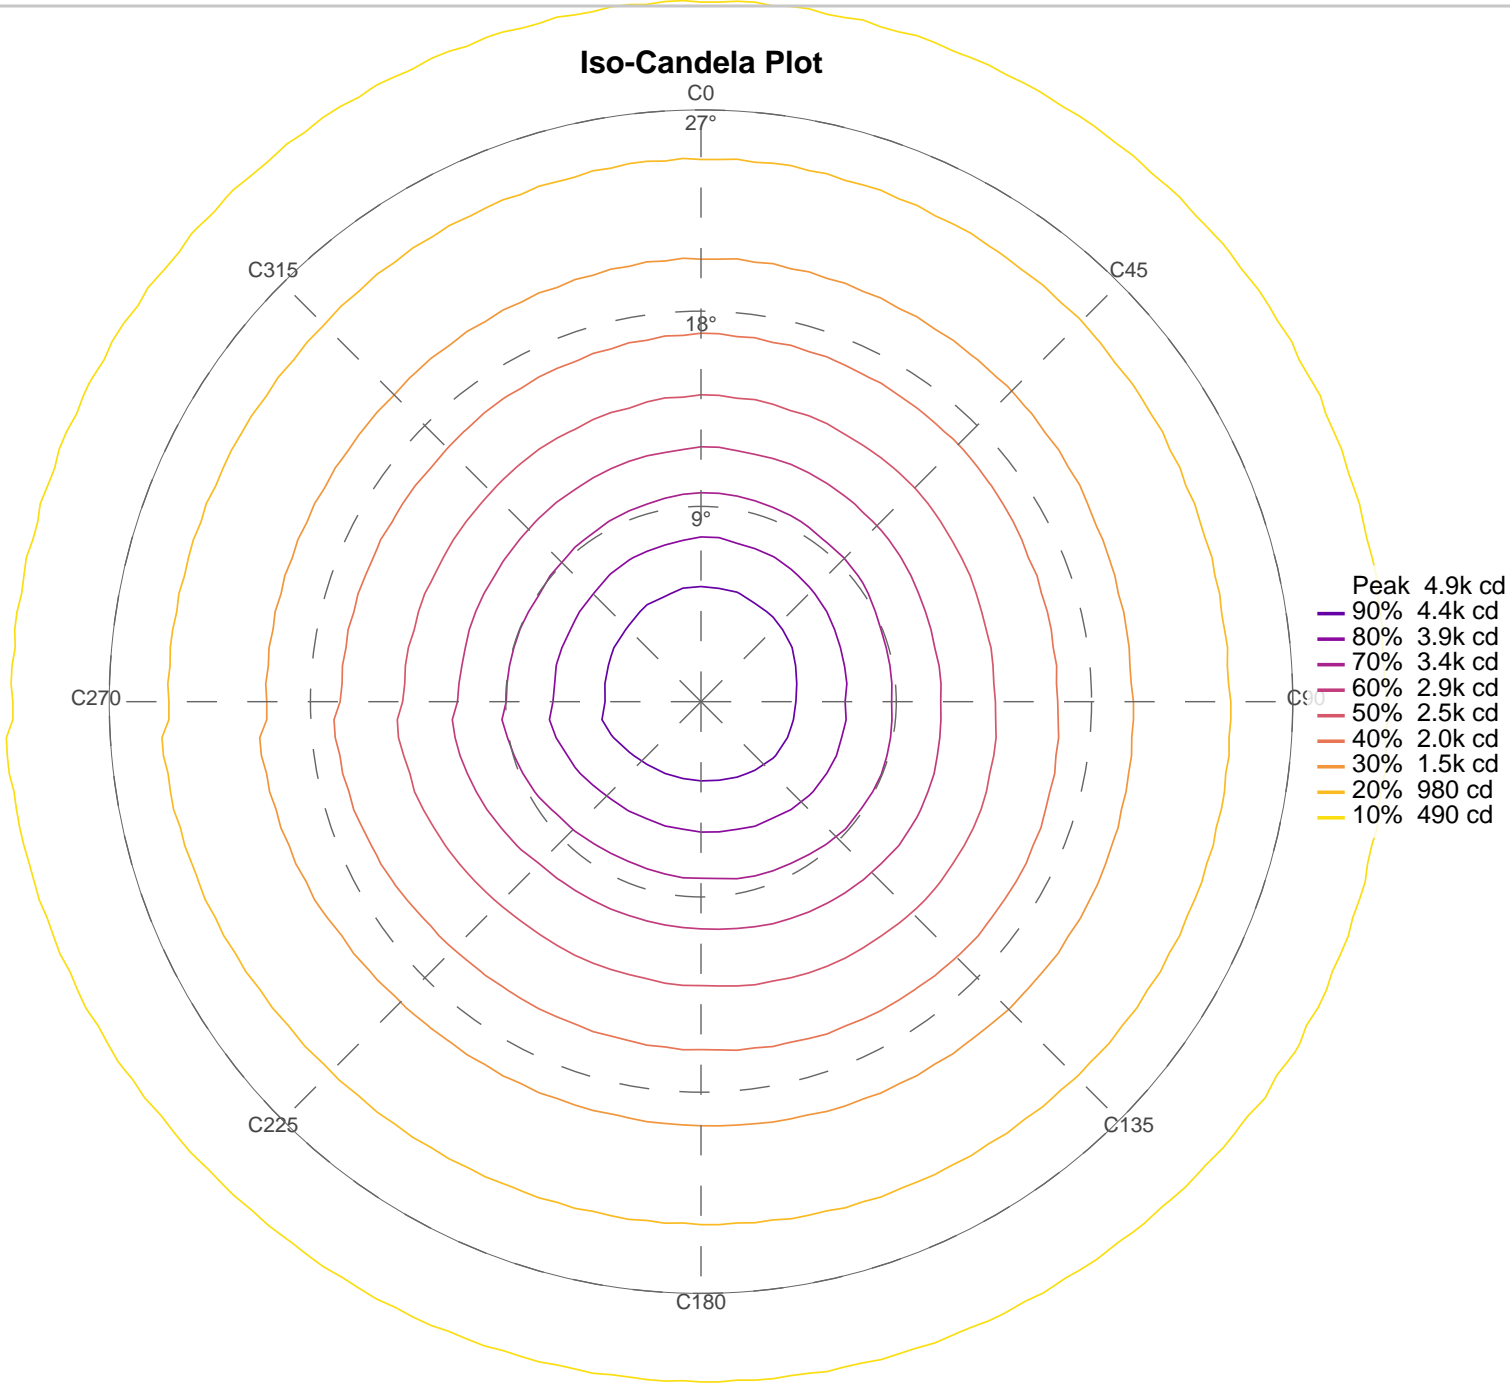


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	323.6 lx
Average	42.5 lx
Min	1.7 lx
Result grid	6 x 6 @ 1.0 m

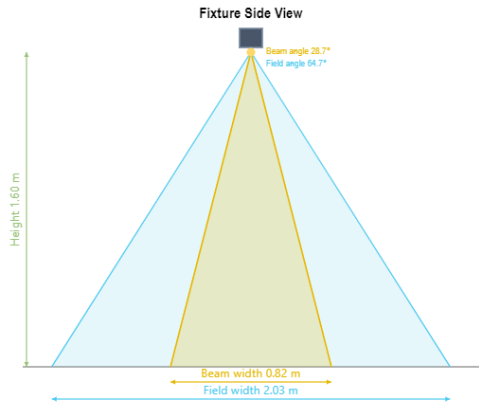

Iso-Illuminance

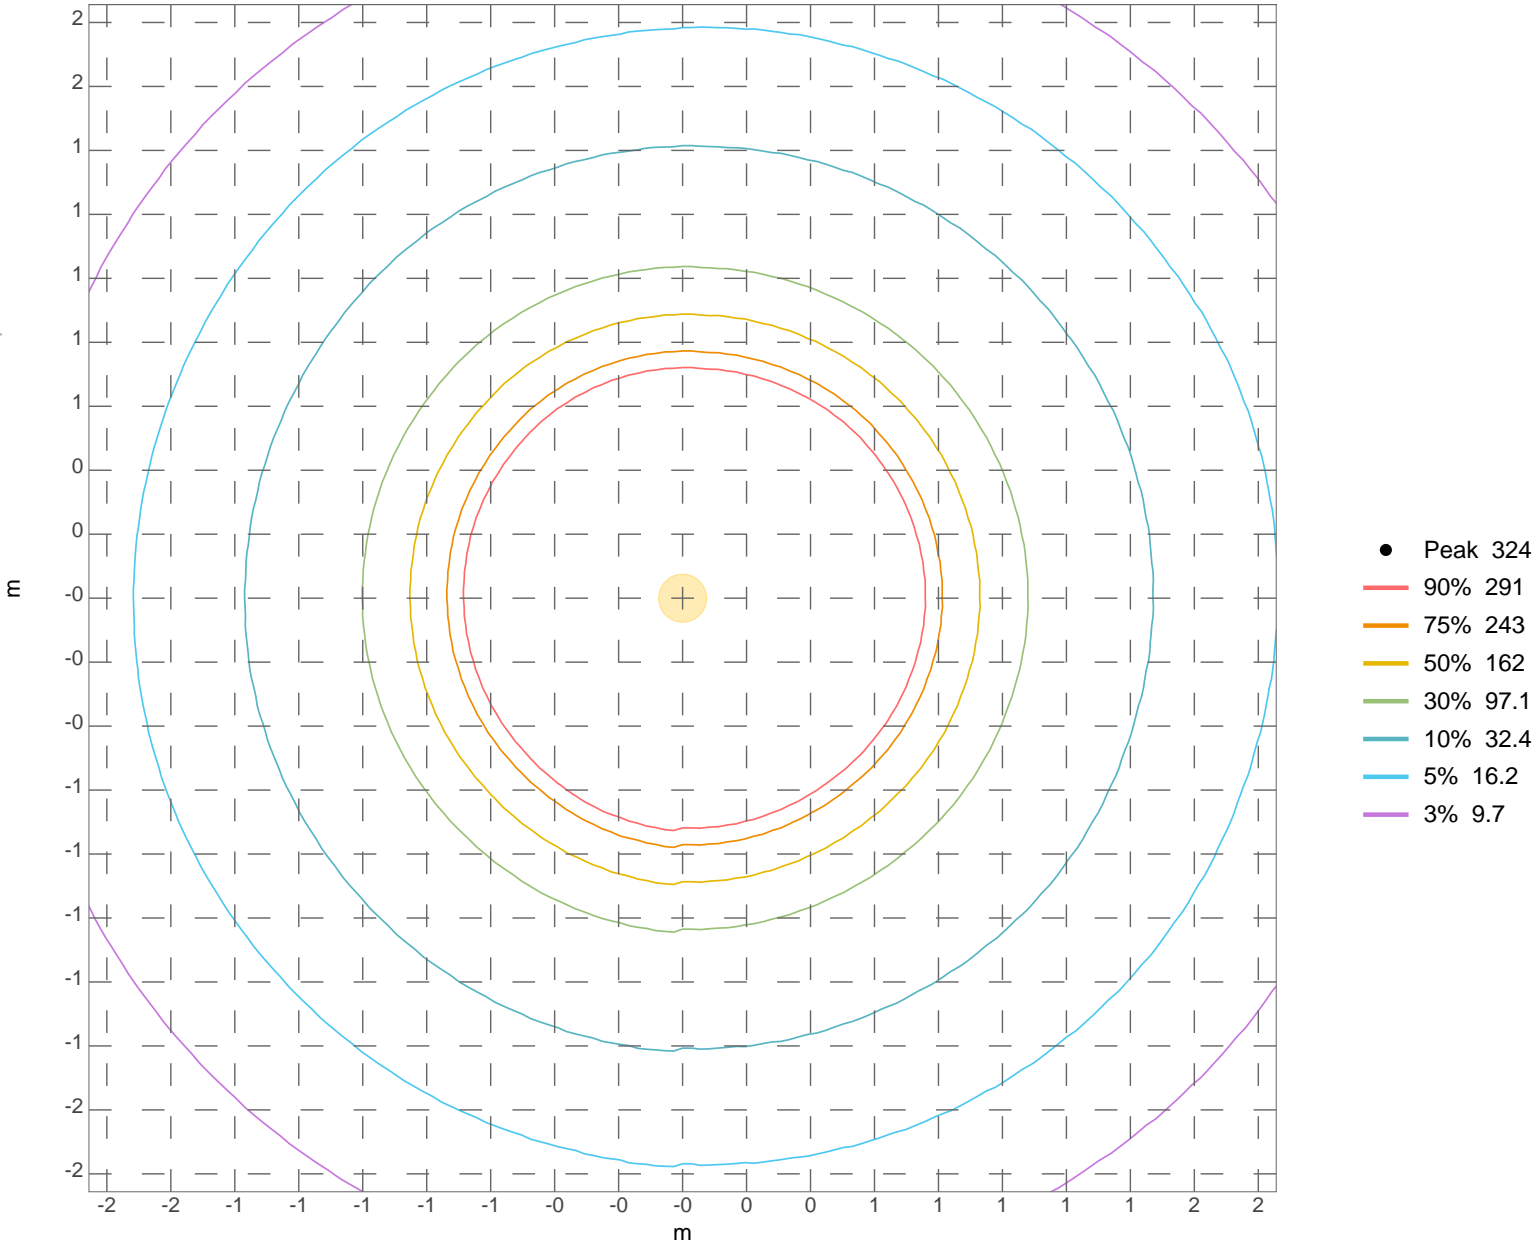

Beam Intensity

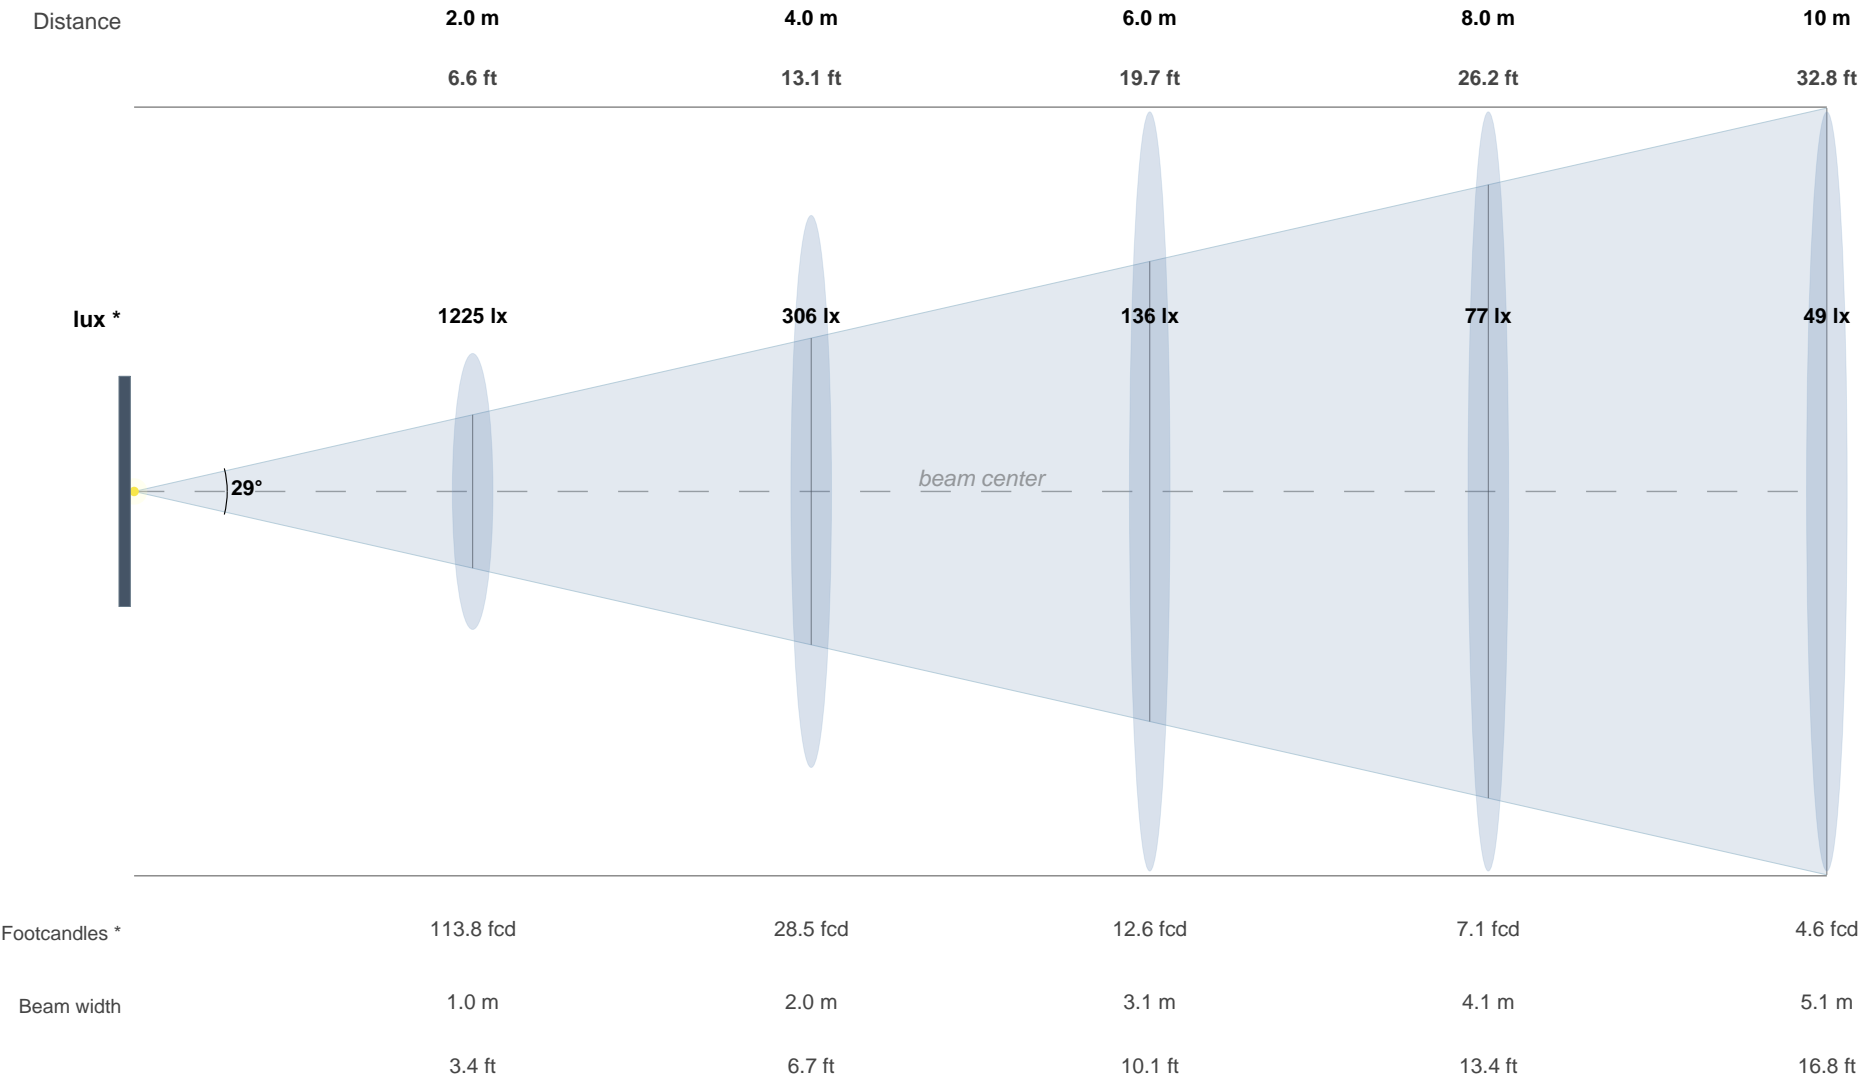

* at beam centre